

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 September 2004 (02.09.2004)

PCT

(10) International Publication Number
WO 2004/073776 A1

(51) International Patent Classification⁷: **A61M 15/00**,
F16K 7/06

(21) International Application Number:
PCT/GB2004/000706

(22) International Filing Date: 20 February 2004 (20.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0304000.3 21 February 2003 (21.02.2003) GB

(71) Applicant (for all designated States except US): **CLINICAL DESIGNS LIMITED** [GB/GB]; The Dower House, Aldsworth, Emsworth, Hampshire PO10 8QT (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BACON, Raymond**,


John [GB/GB]; The Dower House, Aldsworth, Emsworth, Hampshire PO10 8QT (GB). **BOWMAN, Nicholas, John** [GB/GB]; Dilland House, 8A Cross lane Close, Orwell, Royston, Hertfordshire SG8 5QW (GB). **MCDERMONT, Iain, Grierson** [GB/GB]; 2 Mortlock Road, Melbourn, Royston, Hertfordshire SG8 6DB (GB).

(74) Agent: **BROOKS, Nigel**; Hill Hampton, East Meon, Petersfield, Hampshire GU32 1QN (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: DISPENSER

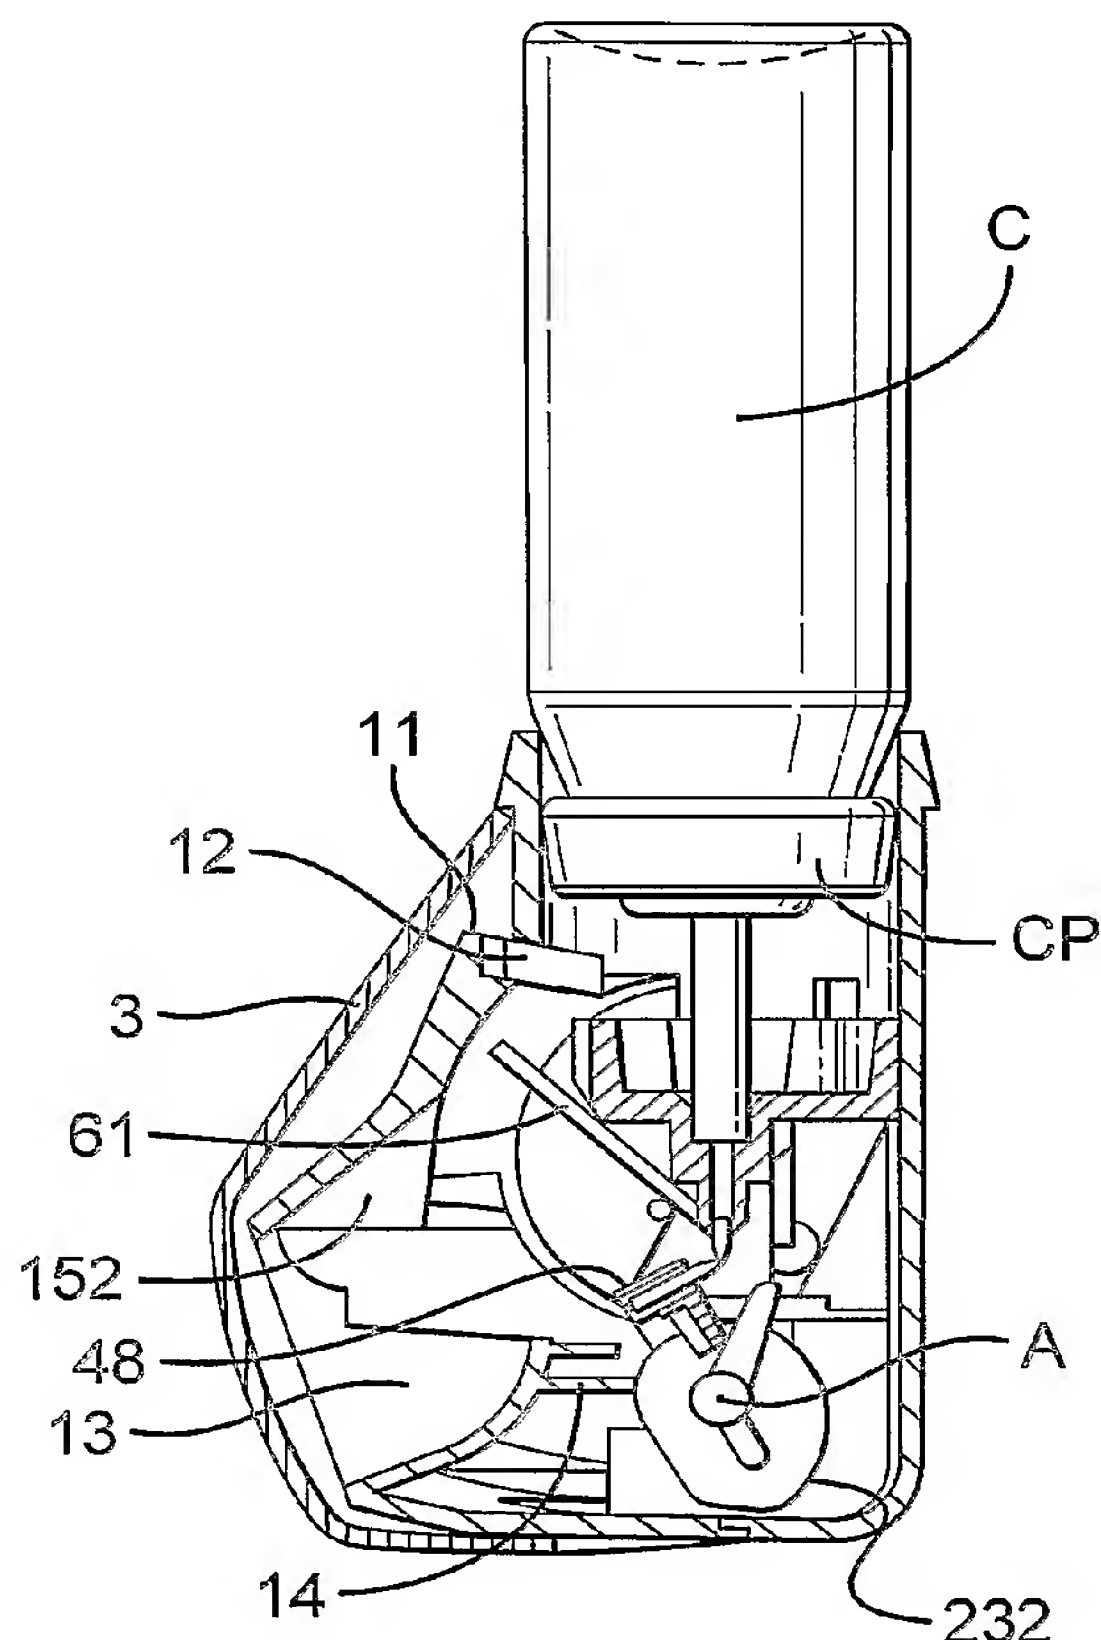

(57) Abstract: An inhalant dispenser has a cover (3) pivotally carried on a body (6). The cover (3) has a cam arrangement for lifting a junction member (41) against the action of the spring in an inhalant can C. Lifting of the junction member (41) cocks a breath actuated dose release mechanisms. The latter includes a flap (61) in the breath path. The flap (61) is carried on the junction member (41) and is arranged to release a hinged member (48) by action of latches (70) on the flap (61) and sears (591, 592) on the hinged member (48).

WO 2004/073776 A1



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

DISPENSER

The present invention relates to a dispenser, particularly though not exclusively for dispensing aerosol or powder borne medicaments.

5

In my prior International Patent Application, WO 98/41254, ("My First International Application") at least as amended on entry in the European Regional Phase, there is described and claimed:

- A dispenser for a gaseous, gas borne or droplet substance, the dispenser
- 10 including:
- a body having a mouthpiece with an inhalation/insufflation orifice at its end;
 - a junction in the body for a source of gas or evaporable liquid comprising or containing the said substance (the source being carried by the body); and
 - a breath actuable valve, for controlling the release of said gas or liquid,
- 15 comprising:
- a valve inlet connected to the junction;
 - a valve outlet;
 - a flexible tube extending from the junction, between the inlet and the outlet, for receiving the said gas or liquid, the tube having a portion which
- 20 is movable between a closed position in which the tube is kinked for closure of the valve and an open position in which the tube is un-kinked for opening of the valve; and
- a movable member, for moving the movable portion of the tube to control its kinking, and being movably mounted in the body for movement by the
- 25 act of inhalation from a rest position towards the orifice – or at least in the direction of air flow through the dispenser;
- the tube being kinked to an obturating extent when the movable member is in a rest position and un-kinked when the movable member is moved on inhalation for release of the gas or liquid.

30

I regard My First International Application as protecting, inter alia, an inhaler with a kink valve.

I improved on the dispenser of My First International Application and in my International Patent Application No. WO 02/11802, ("My Second International Application") there is described in and claimed:

- 5 A dispenser for a gaseous, gas borne or droplet substance contained in a source thereof, the dispenser including:
- a body with a mouthpiece;
 - a junction member in the body for the substance source; and
 - a breath actuable valve, for controlling the release of the gas or liquid containing or comprising the substance, the valve comprising:
 - 10 • a flexible tube for receiving the said gas or liquid, the tube extending from a valve inlet connected to the junction member and having a portion which is kinkable for closure of the valve and movable to an open position in which the tube is un-kinked for opening of the valve; and
 - a member arranged for movement in the body by inhalation to un-kink the
- 15 valve;
- the tube being kinked to an obturating extent when the movable member is in a ready position and un-kinked when the movable member is moved on inhalation for release of the gas or liquid;

wherein:

- 20 • the movable member is or includes a flap arranged in the body for action of breath on it on inhalation;
- the junction member, the flexible tube and the movable flap are a single injection moulding of plastics material; and
 - the movable flap is pivotally connected to the junction member.
- 25

I regard My Second International Application as protecting, inter alia, an inhaler with a kink valve in which the kink valve is integral with the actuation flap.

30 Significant features of the dispenser of My Second International Application are:

1. The junction member is slidably mounted in the body for movement in a direction for dispensing a dose of the substance from the source and the dispenser includes:

- means for pivoting the flap to its ready position on or prior to initial movement of the junction member and
- junction member resilient means for returning the junction member after release of the dose.

5

2. The junction member resilient means is a spring in the source and the dispenser includes:

- means for locating the source in the body with the junction member being slidable towards it and
- 10 • means for displacing the junction member towards the source for dispensing the dose into the kinked tube.

3. The means for displacing the junction member comprises:

- a grippable member rotatably arranged on the body and
- 15 • a rotary-to-linear motion conversion mechanism, arranged to convert rotary motion of the grippable member to linear motion for displacing the junction member towards the source and

the means for pivoting the flap is incorporated in the motion conversion mechanism.

20 Additionally I made other improvements on the dispenser of My First International Application and in my International Patent Application No. WO 02/058772, ("My Third International Application") there is described in and claimed:

A dispenser including in common with that of My First International Application:

- 25 • a body with a mouthpiece;
- a junction in the body for the substance source; and
- a breath actuable valve, for controlling the release of the gas or liquid containing or comprising the substance, the valve comprising:
 - a flexible tube for receiving the said gas or liquid, the tube extending from
 - 30 a valve inlet connected to the junction and having a portion which is kinkable for closure of the valve and movable to an open position in which the tube is un-kinked for opening of the valve; and

- an outlet member arranged for movement in the body on inhalation to un-kink the valve;
- the tube being kinked to an obturating extent when the outlet movable member is in a ready position and un-kinked when the outlet movable member is moved on inhalation for release of the gas or liquid;

the dispenser also including:

- a sear to hold the outlet movable member in the ready position closing of the tube by kinking prior to inhalation and
- a breath actuatable flap arranged in the body for movement on inhalation to release the sear and allow the outlet movable member to move for release of the gas or liquid.

I regard My Third International Application as protecting, inter alia, an inhaler with a kink valve in which the kink valve is formed separately from the actuation flap, and released by a sear on the actuation flap.

The object of the present invention is to provide further improvements in the series of inventions the subject of my three international applications, and in particular to improve the Flap arrangement of My Third International Application in an alternative to My Second International Application in which the kink valve is integral with the actuation flap.

According to the invention there is provided a dispenser for dose dispensing of a gaseous, gas borne or droplet substance from a source thereof, the dispenser comprising:

- a body with a mouthpiece;
- a junction member in the body and having:
 - a socket for receiving a spout of the substance source;
- a breath actuatable valve incorporated with the junction member, for controlling the release of the gas and/or liquid containing or comprising the substance, the valve comprising:

- a flexible tube for receiving a dose of the said substance gas or liquid, the tube extending from a valve inlet connected to the junction member spout and having:
 - a portion which is kinkable for closure of the valve and movable to a release position in which the tube is un-kinked for opening of the valve and
 - an outlet end movable for kinking/un-kinking of the tube; and
- an outlet member carrying the outlet end of the flexible tube and pivotally connected to the junction member for control of kinking/un-kinking movement of the flexible tube;
 - the tube being kinked to an obturating extent when the pivoted outlet member is in a ready position and un-kinked when the pivoted outlet member is moved its release position; and
- a sear on the outlet member to hold it in the ready position prior to inhalation;
- a breath actuatable flap carried on the junction member and arranged for action of inhalation breath on it, the flap having:
 - a latch complementary to the sear and
 - the flap being arranged:
 - to latch the pivoted outlet member for kinked closure of the flexible tube via action of the latch and the sear and
 - to release the pivoted outlet member for unkinking of the tube, and substance release, on inhalation by release of the sear by the latch and movement to its release position of the outlet member.

Normally, the source will be a pressurised, medicament container with a metered dose valve held in the body and the junction member is slidably mounted in the body for movement towards the container and dispensing of a dose to the valve via the junction member.

In the preferred embodiment, the dispenser includes a pivotally mounted closure for the mouthpiece, the closure having a pivot shaft and a cam arranged on the shaft for moving the junction member towards the source for dose release.

In such a dispenser, an expedient feature is provision of a finger on the flap and a finger fast with the pivotal closure are arranged to co-operated for release the pivoted outlet member from its cocked position in the event of closure of the device, without inhalation.

5

Preferably, pivoted outlet member is arranged to move under pressure in the kink tube and/or under resilience, particularly of the kink tube.

10 Normally, the junction member, the kink tube and the pivoted outlet member are an integral plastics material injection moulding, the pivoted outlet member being pivoted to the junction member by one or more living hinges and having an outlet nozzle downstream of the kink tube.

15 Conveniently, the junction member has two pairs of pivot clips for pivotally carrying the flap, which has two moulded pivot pins at its proximal edge.

Again in the preferred embodiment, the flap has at least one latch for co-operating with the or each sear on the pivoted outlet member, the arrangement being such that the latches and the sears when engaged are positioned between parallel
20 planes passing through the pivot axes of the flap and the outlet member on the junction member, whereby breath movement of the flap moves the latches towards the common plane to release the sears and the outlet member. The latches and the sears when engaged are positioned to one side of a common plane passing through the pivot axes. The latches have cam surfaces opposite latch surfaces, for the sears to act on
25 during cocking of the dispenser.

Preferably, the flap has an integral spring acting on the junction member to bias it normally to an inhalation-flow-upstream position; and the flap includes a finger arranged to act on the pivoted outlet member to urge it towards its open position as
30 the flap moves under the action of inhalation breath.

To help understanding of the invention, a specific embodiment thereof will now be described by way of example and with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a dispenser according to the invention in closed position;

Figure 2 is a similar view of the dispenser in open position;

Figure 3 is a central cross-sectional view of the dispenser closed;

5 Figure 4 is an exploded view of the dispenser;

Figure 5 is an inside, front, rear view of a main body part of the dispenser;

Figure 6 is an inside, rear, view of a cover of the dispenser;

Figure 7 is an oblique view from the front and below of a front body part of the dispenser;

10 Figure 8 is a view from the opposite direction of the front body part;

Figure 9 is an oblique view from the front and below of a junction member of the dispenser, in its as moulded configuration;

Figure 10 a rear view of the junction member;

15 Figure 11 is a cross-sectional side view of the junction member on the line A-A in Figure 10;

Figure 12 is a cross-sectional side view of the cover on line C-C in Figure 6;

Figure 13 is a central, cross-sectional side view of the cover on line B-B in Figure 6;

Figure 14 is a perspective view from behind of a flap of the dispenser;

20 Figure 15 is a plan view of the flap;

Figure 16 is a side view of the flap; and

Figure 17 is a series of scrap views of the flap and kink valve in the junction member illustrating operation of the valve.

25 Referring first to Figures 1 to 4 of the drawings, the dispenser there shown is a development of that shown in Figures 13 to 17 of My Second International Application, although it includes features of My Third International Application

The dispenser has a body 1 with a mouthpiece 2 and a pivoted mouthpiece
30 cover 3. The mouthpiece is formed as an aperture 4 in a separate body part 5 clipped to a main body part 6. The main part 6 has upper and lower formations 7,8 and the mouthpiece part has upper and lower complementary formations 9,10 which engage when the mouthpiece part is slid from below to engage with the main part. The separate body part 5 is cutaway 11 with respect to the main body part 6, to define an

air inlet 12 exposed by the cover 3 when this is open. A medicament can C is fitted to the body part 6. Immediately within the air inlet 12 is a guard 13 against little fingers. It is backed up by strengthening flanges 14, which additionally guard the cam mechanism to be described in the next paragraph.

5

Above the guard 13, a series of four ribs extend and provide further guarding. The end ones 151 are longer and provide eventual stops for the flap of the actuation mechanism described below in the case of malfunction. The inner ones 152 act as flow restrictors to cause a pressure drop between the inlet 12 and the aperture 4 when
10 the mechanism has been actuated, primarily to control the air flow rate through the device.

The cover 3 – see Figures 6, 12 & 13 – is pivoted about an axis A low in the body at the joint between the two body parts. Integrally moulded with the cover 3 is a
15 C section shaft 21, via webs 22. The shaft carries a cam arrangement 23, comprising two cam lobes 231 and 232, together with two fingers, a central one 24 and a outer one 25. The latter is integral with one of a pair of discs 26, between which and the cam lobes, the shaft is bearingly supported by part circular journals 27 in flanges 28 integrally moulded within the main body part 6. At the joint line between the two
20 body 5,6 further coaxial scallops 29 are provided for the shaft 21.

The body parts 5,6, and the cover 3 (with the shaft and cam arrangement) are of moulded polypropylene material, whereby they can be fitted together with a modicum of flexure.

25

The can C is held in an opening 31 at the upper end of the main body part 6, where the body part extends completely around a valve crimp portion CP of the can C. The actual arrangement for holding the can connected to the body part forms no part of this invention, but can be as disclosed in my recently filed British Patent
30 application No 0227489.2.

Moulded inside the main body part, inwards of the opening are internal grooves 32. A junction member 41 – see Figures 9, 10 & 11 – is slidably accommodated in the body with the grooves 32 engaged by ribs 42 in its periphery.

The junction member also is of moulded polypropylene. Centrally, the junction member has a socket 43 for an outlet stem S of the can. The socket is continued by a passage 44, which has a thin wall, kinkable portion 45 and a nozzle end 46. This is in a movable valve part 48 of the junction member. The main part 411 of the junction member 41 and the valve part 48 are connected by a living hinge 49, in the form of two membranes 491,492 at respective sides of the junction member between lugs 501,502 and tabs 511,512. The tabs are interconnected by a bar 52 having the nozzle aperture 53. Between the lugs 501,502 and on either side of the kink tube 45 extend two followers 541,542, which are integral with the respective lugs 501,502 and are acted on by the cam lobes 231,232, with the interposition of tongues 551,552 extending from the inside of the main body part 6 to react lateral action on the junction member from the cam. The followers 541,542 have radiused portions 56, centred on the hinge axis, with upper and lower valve travel stops 571,572.

15 Additionally, the lugs 501,502 carry on their sides facing the same direction as the radiused portions 56, pairs of pivot clips 581,582 for pivotally locating the flap to be described below. On the same side of moulding a pair of sears 591,592 are provided on the tabs 511,512.

20 The flap 61 – see Figures 14,15 & 16 – has a pivot axis B. At opposite ends of the axis, the flap has small thrust flanges 62, with pivot pins 60 set in from them. Inboard of the pins, two swellings 63 are formed. Each has a finger 64,65 extending obliquely down from it. One of the swellings has a spring loop 66 extending backwards, inwards and forwards again with its distal end 67 adjacent the swelling to which its proximal end 68 is attached. Set into the swellings from the pins are apertures 69 formed from above and latches 70 extending below the apertures. These have latch surfaces 71 formed during moulding by projections through the apertures. The latches have cam surfaces 72. These are positioned so as to abut the sears 591,592 as the device is cocked. The sears then pass over the end of the cam surfaces and come to engage on the latch surfaces. The final feature of flap is a tongue 73, which extends between the followers 541,542 to control air leakage as might otherwise occur.

The operation of the device will now be described.

Initially, the device is closed and the flexible members are relaxed. In others words the flap is in its upper, upstream position, as shown in Figure 3 & 17 (1), and the hingeable part 48 of the junction member is in its lower position. The flap is held in this position by its spring 66, bearing with its distal end 67 on an abutment 81 set in from the lug 502. The movable portion of the junction member is pivoted down, due to the tendency of the kink tube to straighten to its as moulded state. Its position is controlled by two fingers 82 projecting laterally from the bar 52 to abut with the cam lobes 231,232.

On opening of the cover, the cam lobes act via the tongues 551,552 on the followers 541,542. They lift the junction member 41 against the internal spring – not shown – of metering valve in the can, with displacement of stem S inwards of the can. As the cover is rotated, the central finger 24 between the cam lobes engages with a notched projection 83 between the fingers 82 on the hingeable part of the junction member. This action lifts the movable member and closes the kink tube. Further lifting opens the can's valve and a dose metered by the can's valve is released into the upper part of the tube. It is retained there by the kink tube acting as a closed valve.

Naturally, the dose is retained only whilst the hingeable part 48 of the valve is retained in the upper position to which it has been moved. This is achieved by the sears 591,592 running along the cam surfaces 72 and engaging with the latch surfaces 71. As the sears move into engagement, the latches 70 are moved back, rotating the flap down somewhat against the action of the spring 66. Once the sears clear the end of the cam surfaces, the spring moves the latches in under the sears. There is clearance for the hingeable part 48 to continue to pivot further, until the central finger 24 passes on out of engagement with the projection 83. The device is now cocked for inhalation.

Breathing in through the mouthpiece causes an air flow down through the air inlet 12, exposed on opening of the cover, and impinging on the flap 61 as such. It is blown down against the action of the spring 66, releasing the sears. The kink tube tends to straighten under the action of its own resilience and the pressure of the

retained dose; and the dose is released through the nozzle into the mouthpiece for inhalation, the nozzle traversing the mouthpiece aperture 4 as the dose is released.

5 The geometrical arrangement of the flap and the hingeable part 48 can be seen in Figure 17. The pivot axis B of the flap is spaced from the pivot axis D of the hingeable part, with the point of engagement of the sears 591 and latches 70 lying between parallel planes B' and D' passing through the axes B and D. The actual points of engagement lie to the flap side of a common plane P passing through the axes.

10

After use, the cover is closed. The cams allow the movable member to return down and the finger 24 passes the notched projection 83 as a result of cam surfaces 84 on their reverse faces.

15 Should the kink tube have lost its resilience and be slow in opening, the finger 64, at the spring side of the flap pivot acts on a lug 85 moulded integrally with the hingeable part's lug 511 and extending back past the hinge axis H. This the hingeable part is moved to its open position.

20 A further eventuality is closure of the cover without inhalation. In this event, the finger 65 is engaged by the finger 25 to deflect the flap to its position in which the hingeable part releases the dose. The spring 66 returns the flap after this movement of it (which of course occurs on closure even if the dose has been released by inhalation). Thus the device is returned to its initial position in which the plastics
25 material resilient features are relaxed.

All the components are of device (excluding the can) are moulded of polypropylene, with the exception of the flap, whose spring dictates use of acetal.

30

CLAIMS:

1. A dispenser for dose dispensing of a gaseous, gas borne or droplet substance from a source thereof, the dispenser comprising:

- a body with a mouthpiece;
- 5 • a junction member in the body and having:
 - a socket for receiving a spout of the substance source;
 - a breath actuatable valve incorporated with the junction member, for controlling the release of the gas and/or liquid containing or comprising the substance, the valve comprising:
 - 10 • a flexible tube for receiving a dose of the said substance gas or liquid, the tube extending from a valve inlet connected to the junction member spout and having:
 - a portion which is kinkable for closure of the valve and movable to a release position in which the tube is un-kinked for opening of the valve
 - 15 and
 - an outlet end movable for kinking/unkinking of the tube; and
 - an outlet member carrying the outlet end of the flexible tube and pivotally connected to the junction member for control of kinking/un-kinking movement of the flexible tube;
 - 20 • the tube being kinked to an obturating extent when the pivoted outlet member is in a ready position and un-kinked when the pivoted outlet member is moved its release position; and
 - a sear on the outlet member to hold it in the ready position prior to inhalation;
 - a breath actuatable flap carried on the junction member and arranged for
 - 25 action of inhalation breath on it, the flap having:
 - a latch complementary to the sear and
 - the flap being arranged:
 - to latch the pivoted outlet member for kinked closure of the flexible tube via action of the latch and the sear and
 - 30 to release the pivoted outlet member for unkinking of the tube, and substance release, on inhalation by release of the sear by the latch and movement to its release position of the outlet member.

2. A dispenser as claimed in claim 1, wherein the source is a pressurised, medicament container with a metered dose valve held in the body and the junction member is slidably mounted in the body for movement towards the container and dispensing of a dose to the valve via the junction member.
- 5 3. A dispenser as claimed in claim 2, including a pivotally mounted closure for the mouthpiece, the closure having a pivot shaft and a cam arranged on the shaft for moving the junction member towards the source for dose release.
4. A dispenser as claimed in claim 3, wherein a finger on the flap and a finger fast with the pivotal closure are arranged to co-operated for release the pivoted outlet
10 member from its cocked position in the event of closure of the device, without inhalation.
5. A dispenser as claimed in any preceding claim, wherein the pivoted outlet member is arranged to move under pressure in the kink tube and/or under resilience, particularly of the kink tube.
- 15 6. A dispenser as claimed in any preceding claim, wherein the junction member, the kink tube and the pivoted outlet member are an integral plastics material injection moulding, the pivoted outlet member being pivoted to the junction member by one or more living hinges and having an outlet nozzle downstream of the kink tube.
7. A dispenser as claimed in claim 6, wherein the junction member has two pairs of
20 pivot clips for pivotally carrying the flap, which has two moulded pivot pins at its proximal edge.
8. A dispenser as claimed in claim 6 or claim 7, wherein the flap has at least one latch for co-operating with the or each sear on the pivoted outlet member, the arrangement being such that the latches and the sears when engaged are positioned
25 between parallel planes passing through the pivot axes of the flap and the outlet member on the junction member, whereby breath movement of the flap moves the latches towards the common plane to release the sears and the outlet member.
9. A dispenser as claimed in claim 8, wherein the latches and the sears when engaged are positioned to one side of a common plane passing through the pivot axes.
- 30 10. A dispenser as claimed in claim 8 or claim 9, wherein the latches have cam surfaces opposite latch surfaces, for the sears to act on during cocking of the dispenser.

11. A dispenser as claimed in and preceding claim, wherein the flap has an integral spring acting on the junction member to bias it normally to an inhalation-flow-upstream position.

12. A dispenser as claimed in any preceding claim, wherein the flap includes a finger
5 arranged to act on the pivoted outlet member to urge it towards its open position as the flap moves under the action of inhalation breath.

1/8

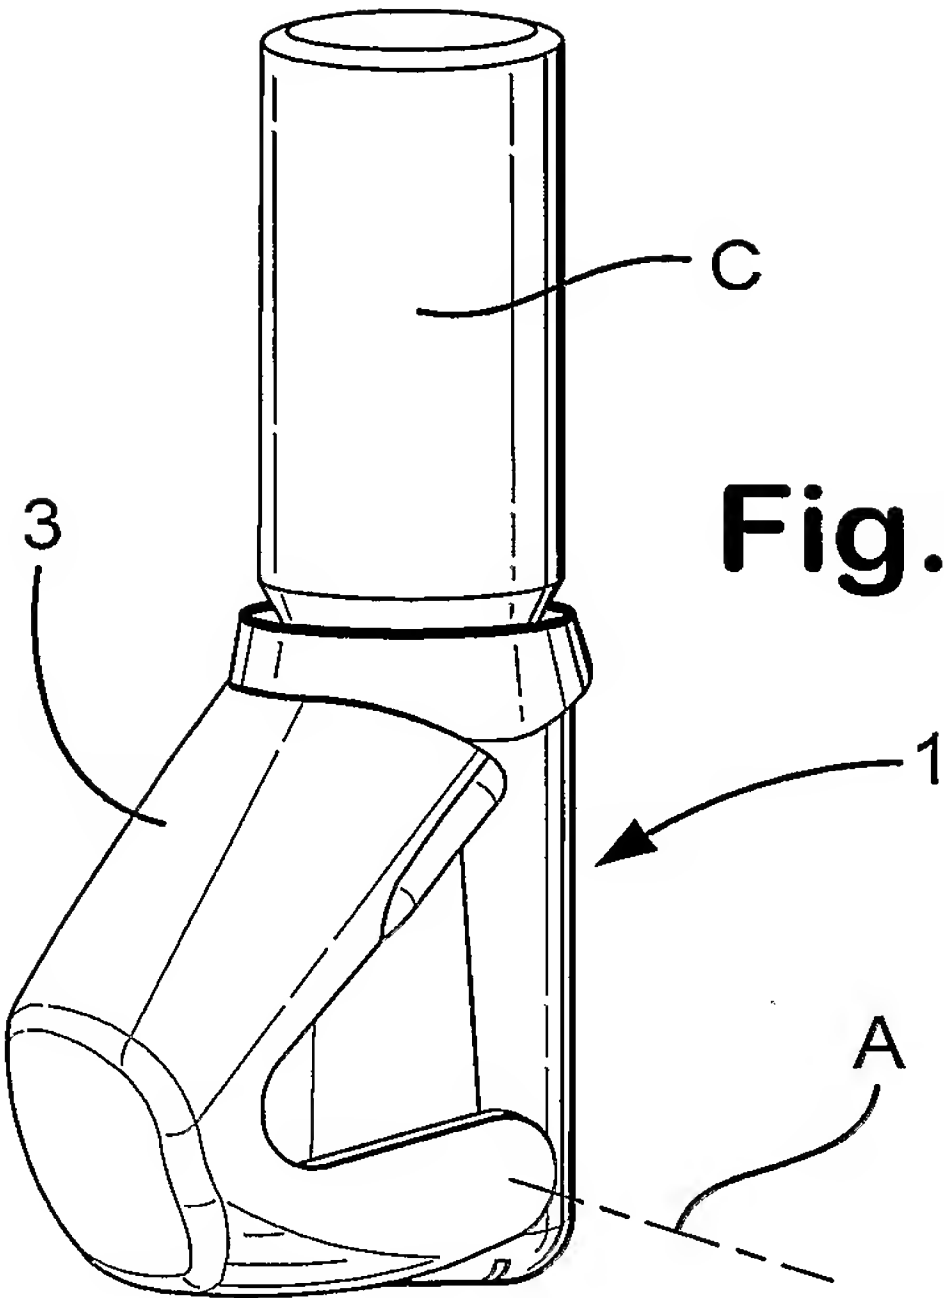


Fig.1

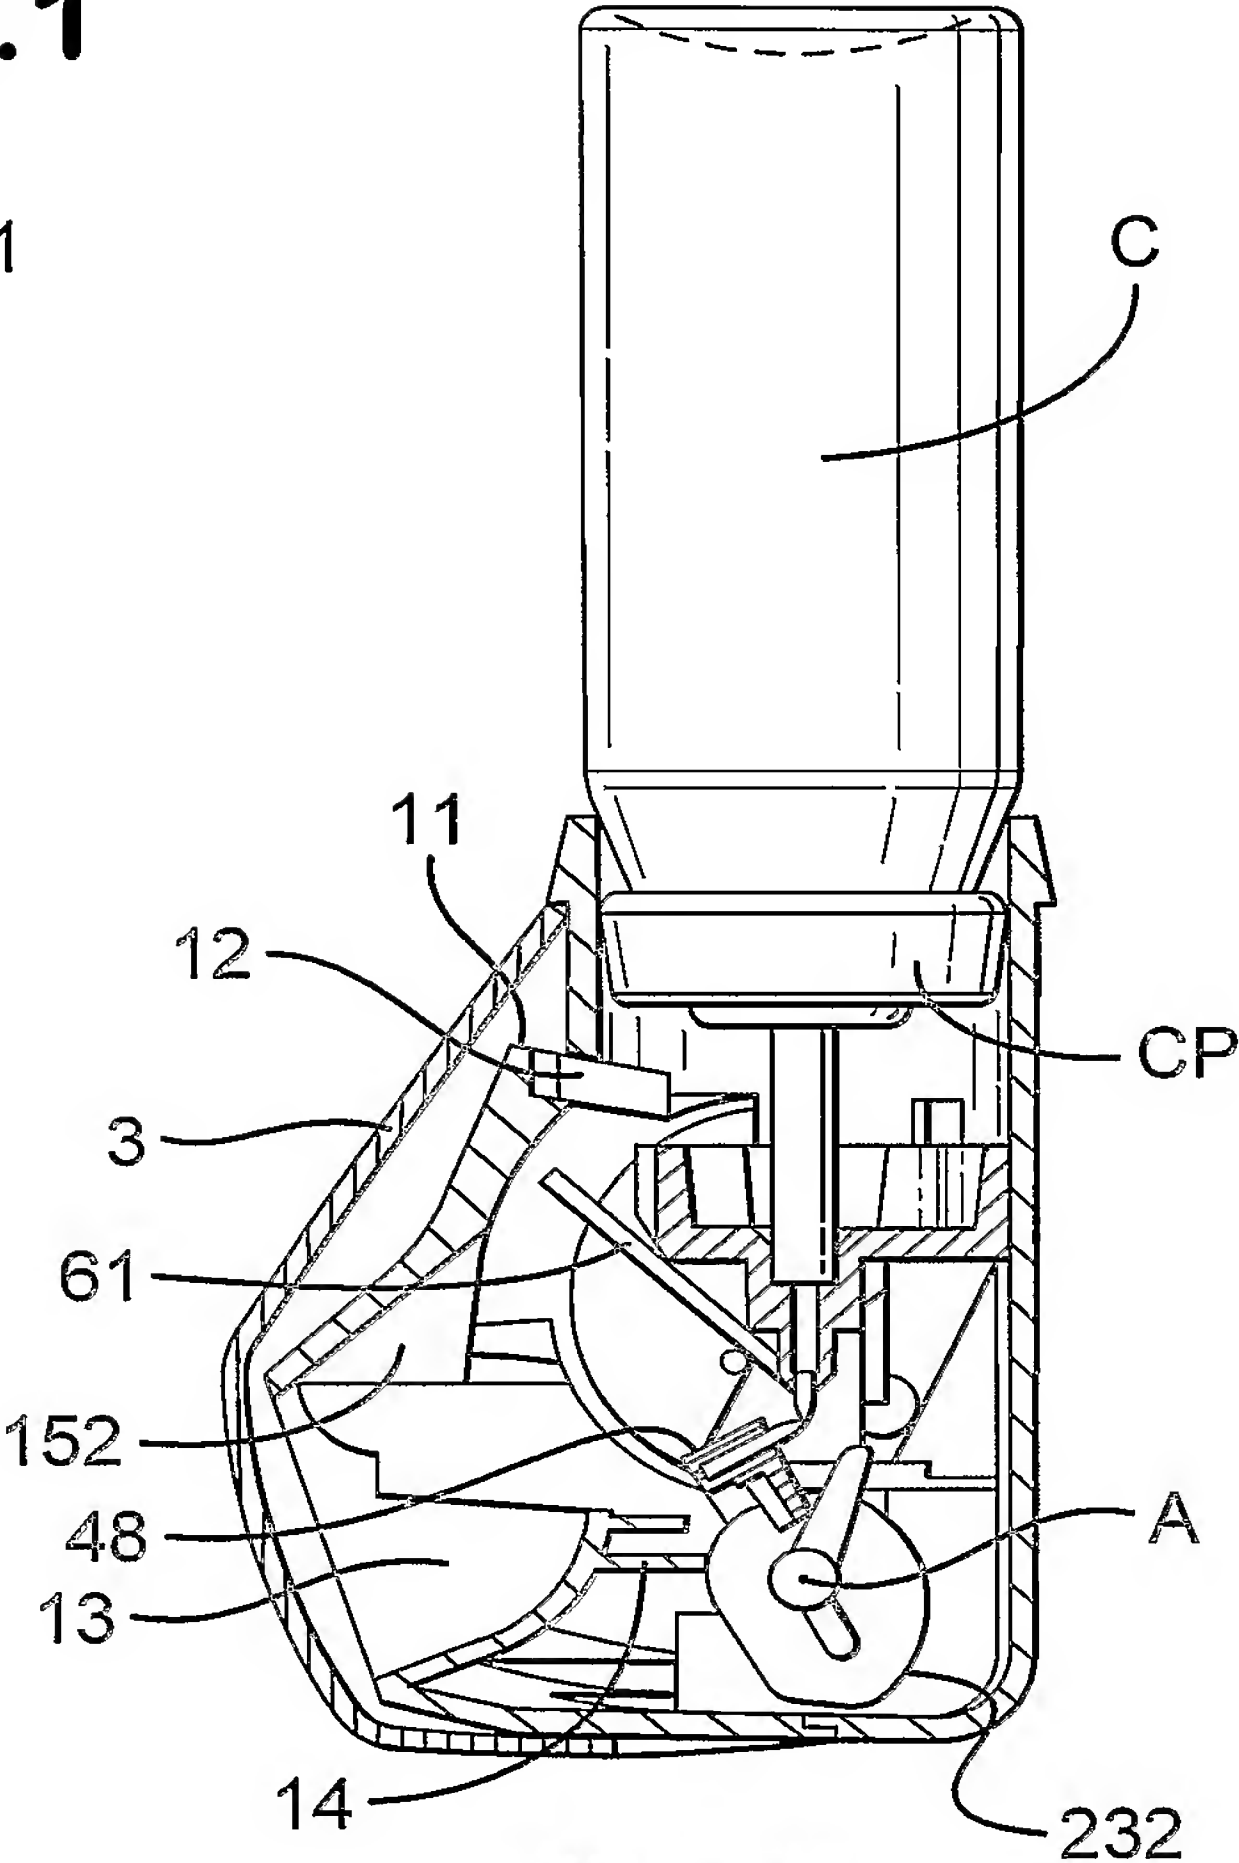


Fig.3


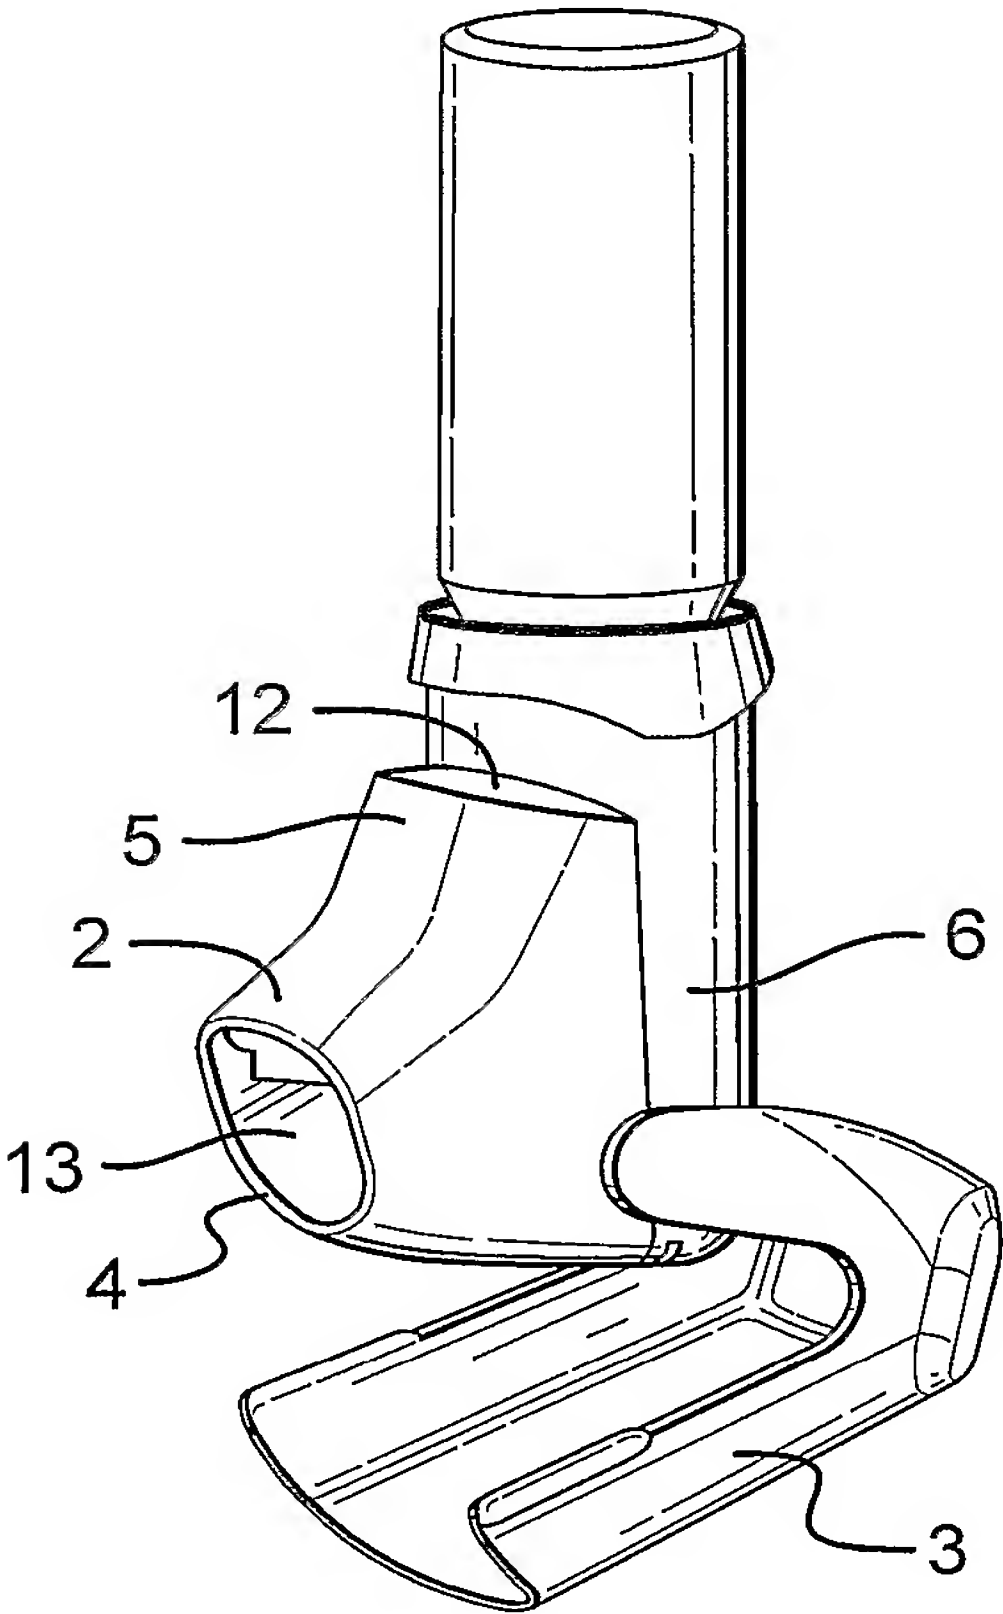


Fig.2

2/8

Fig.4

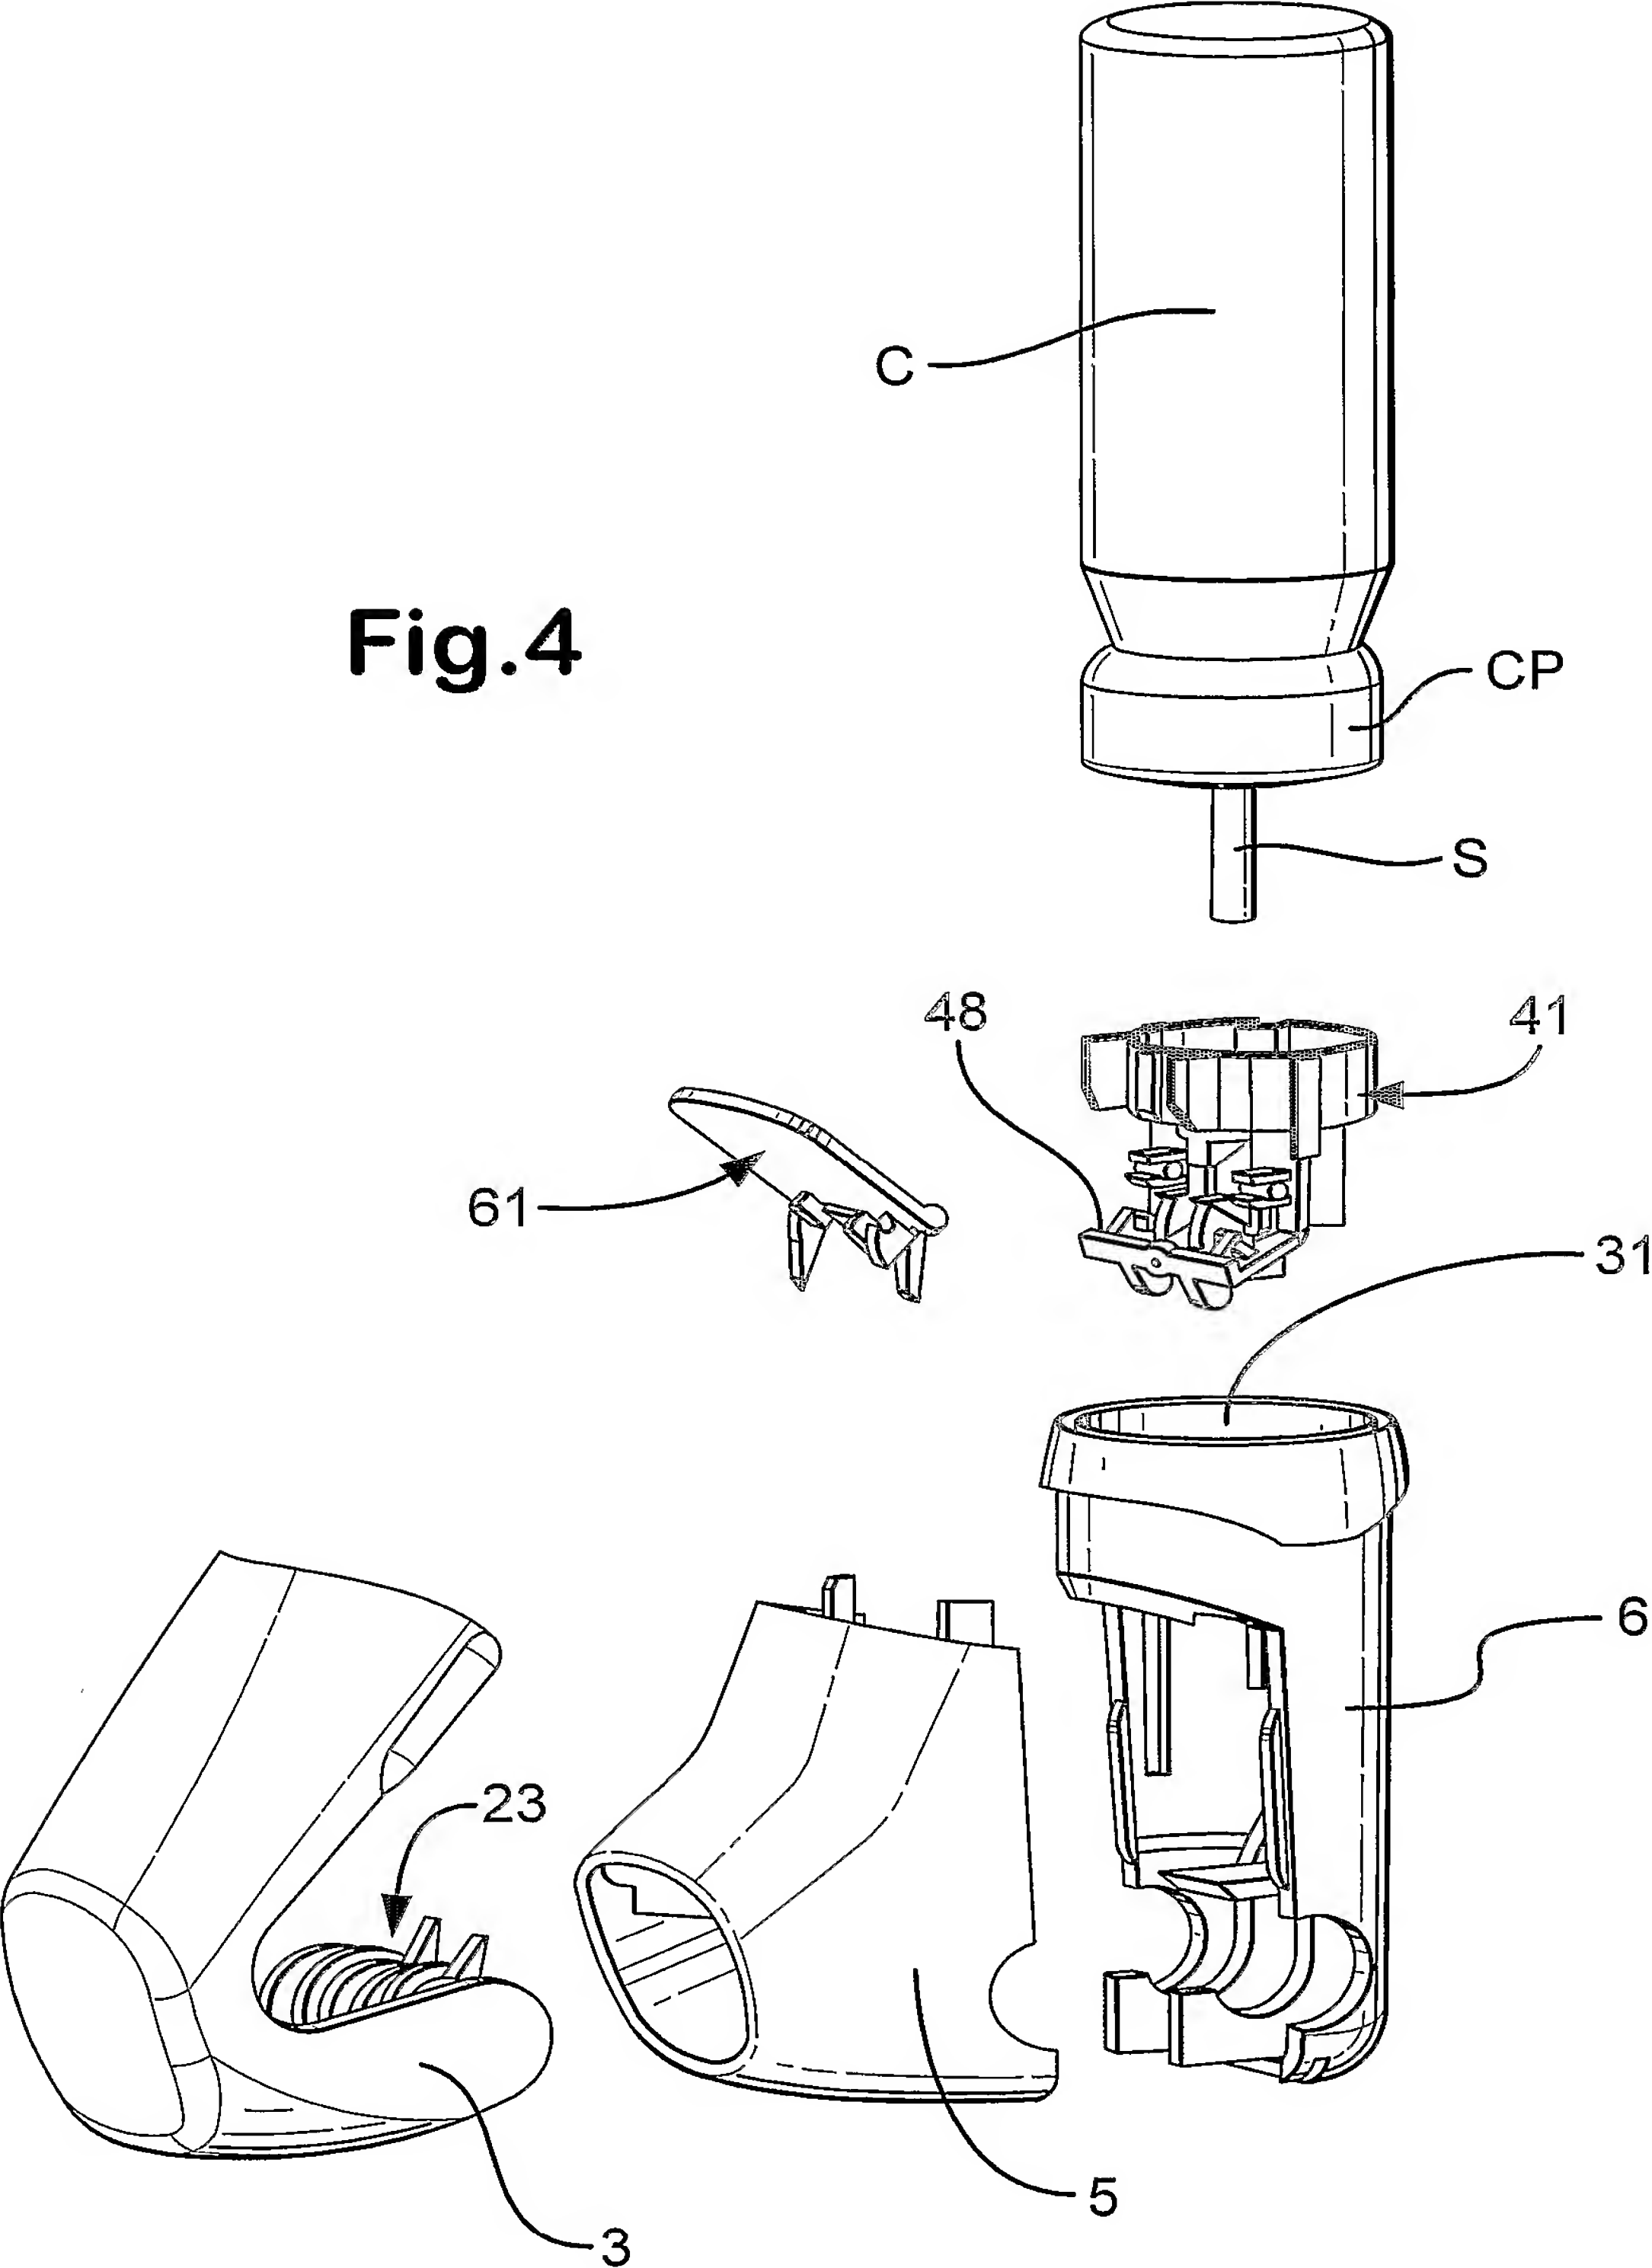

3/8




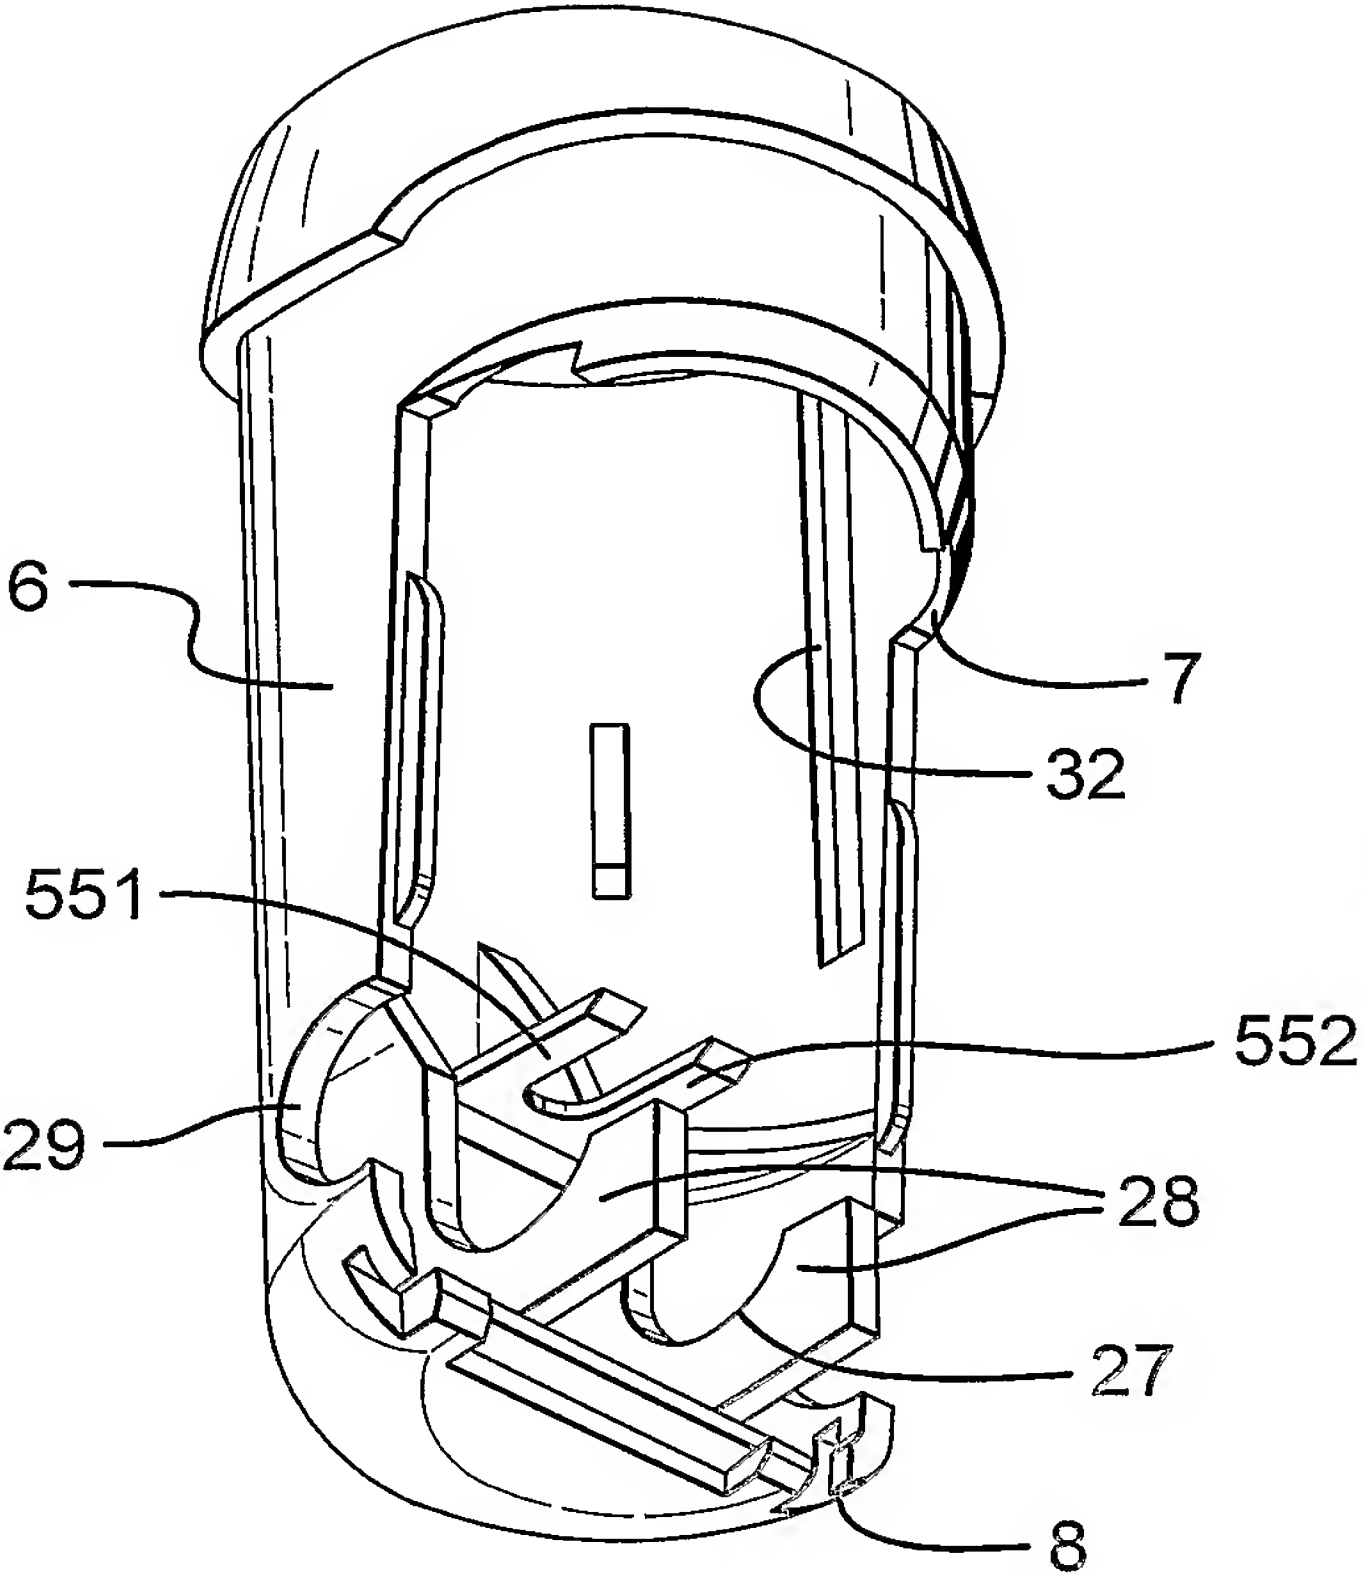


Fig.5

Fig.6

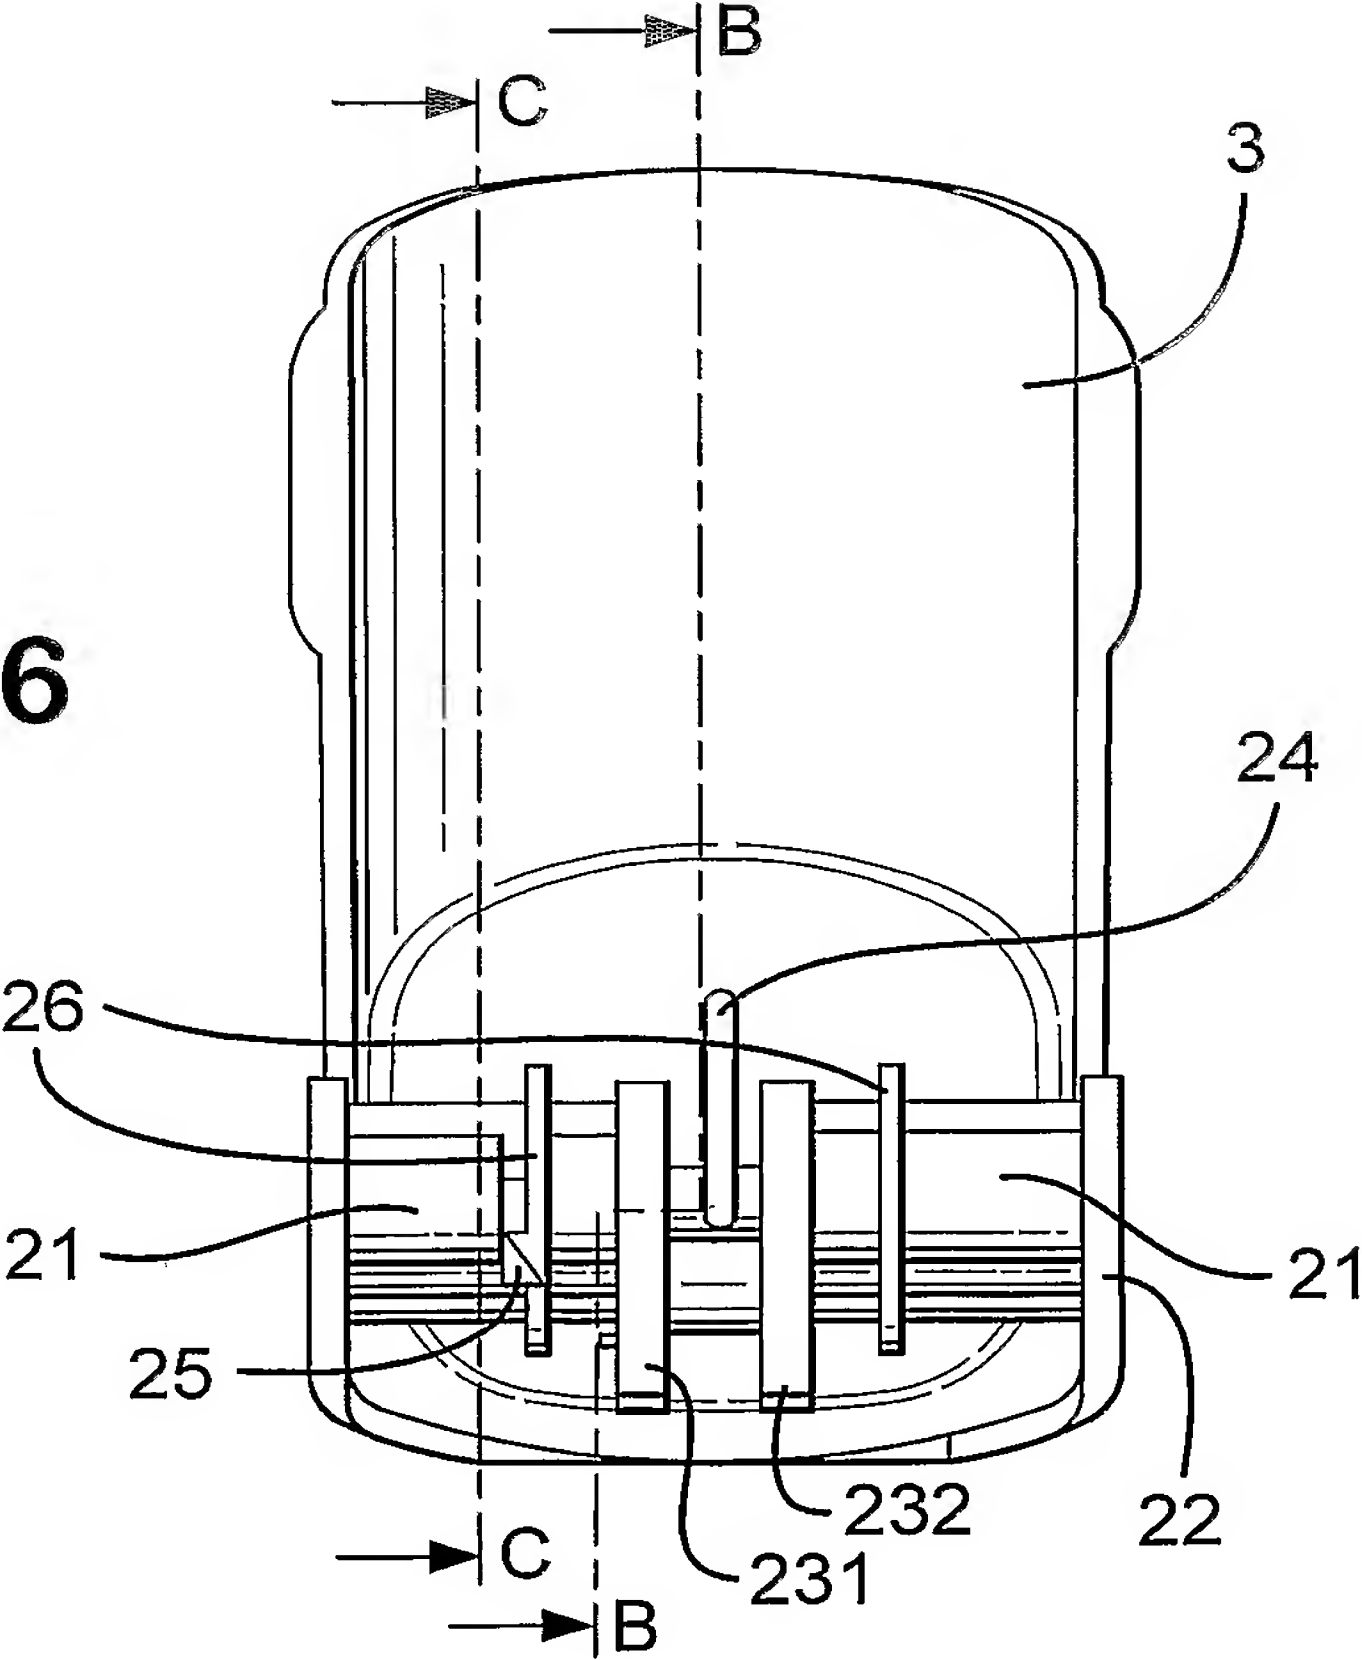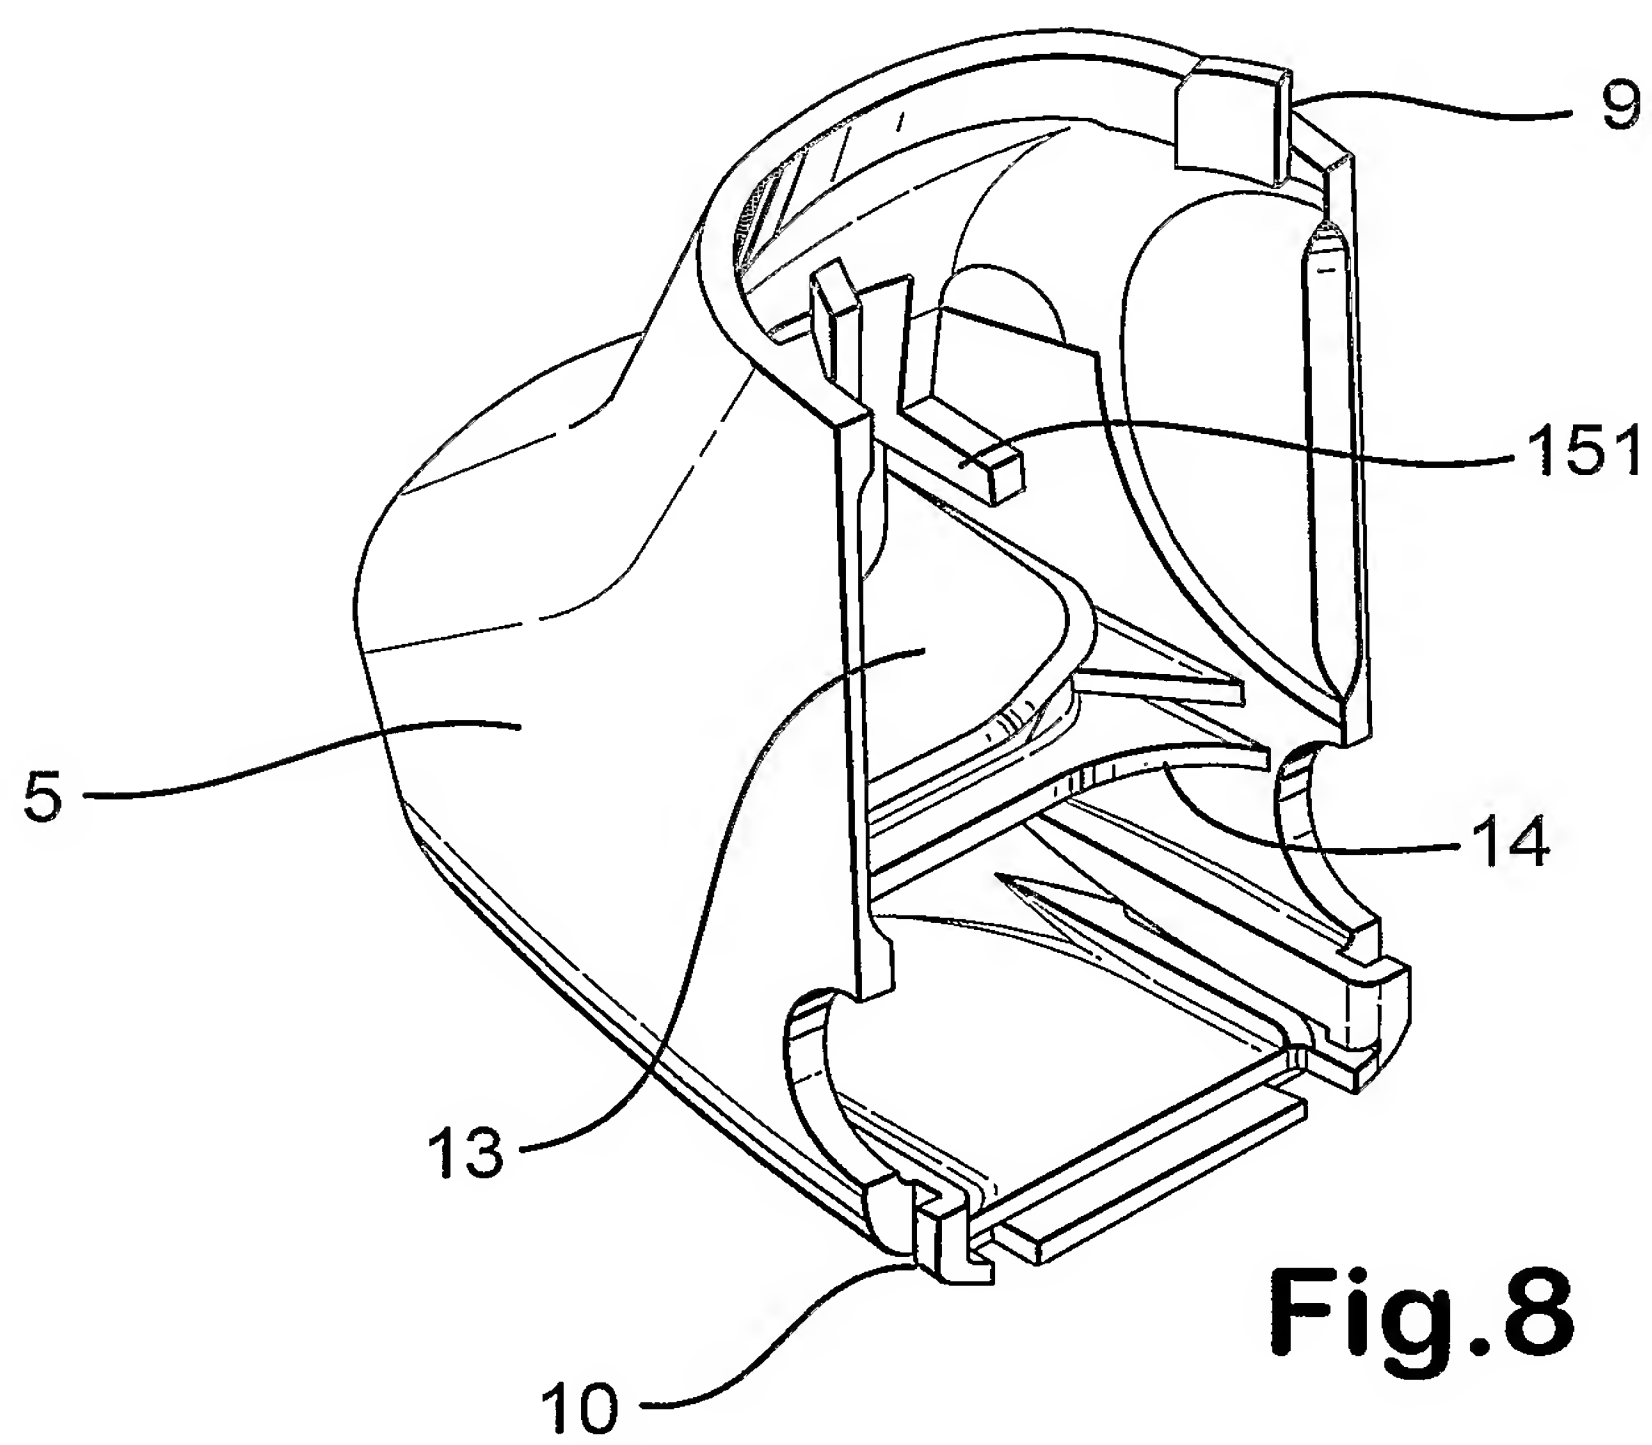

4/8

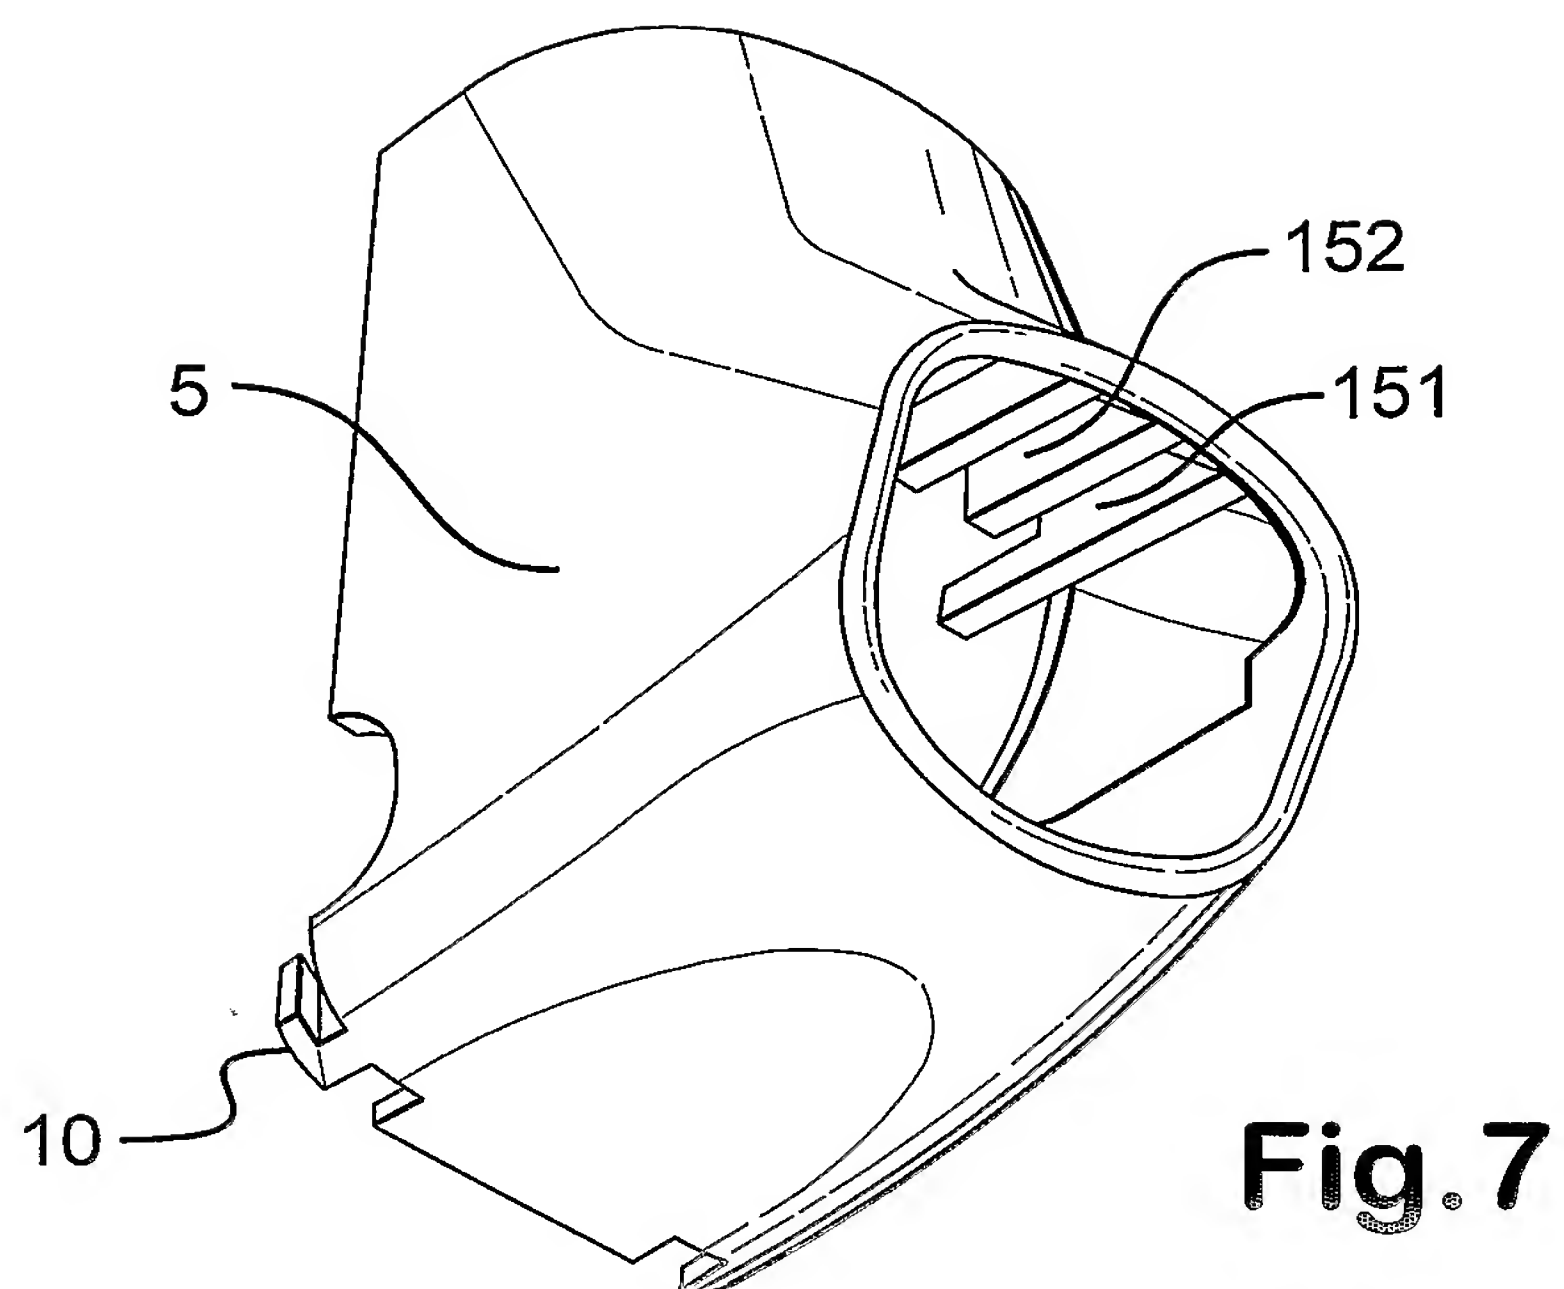

5/8

Fig.9



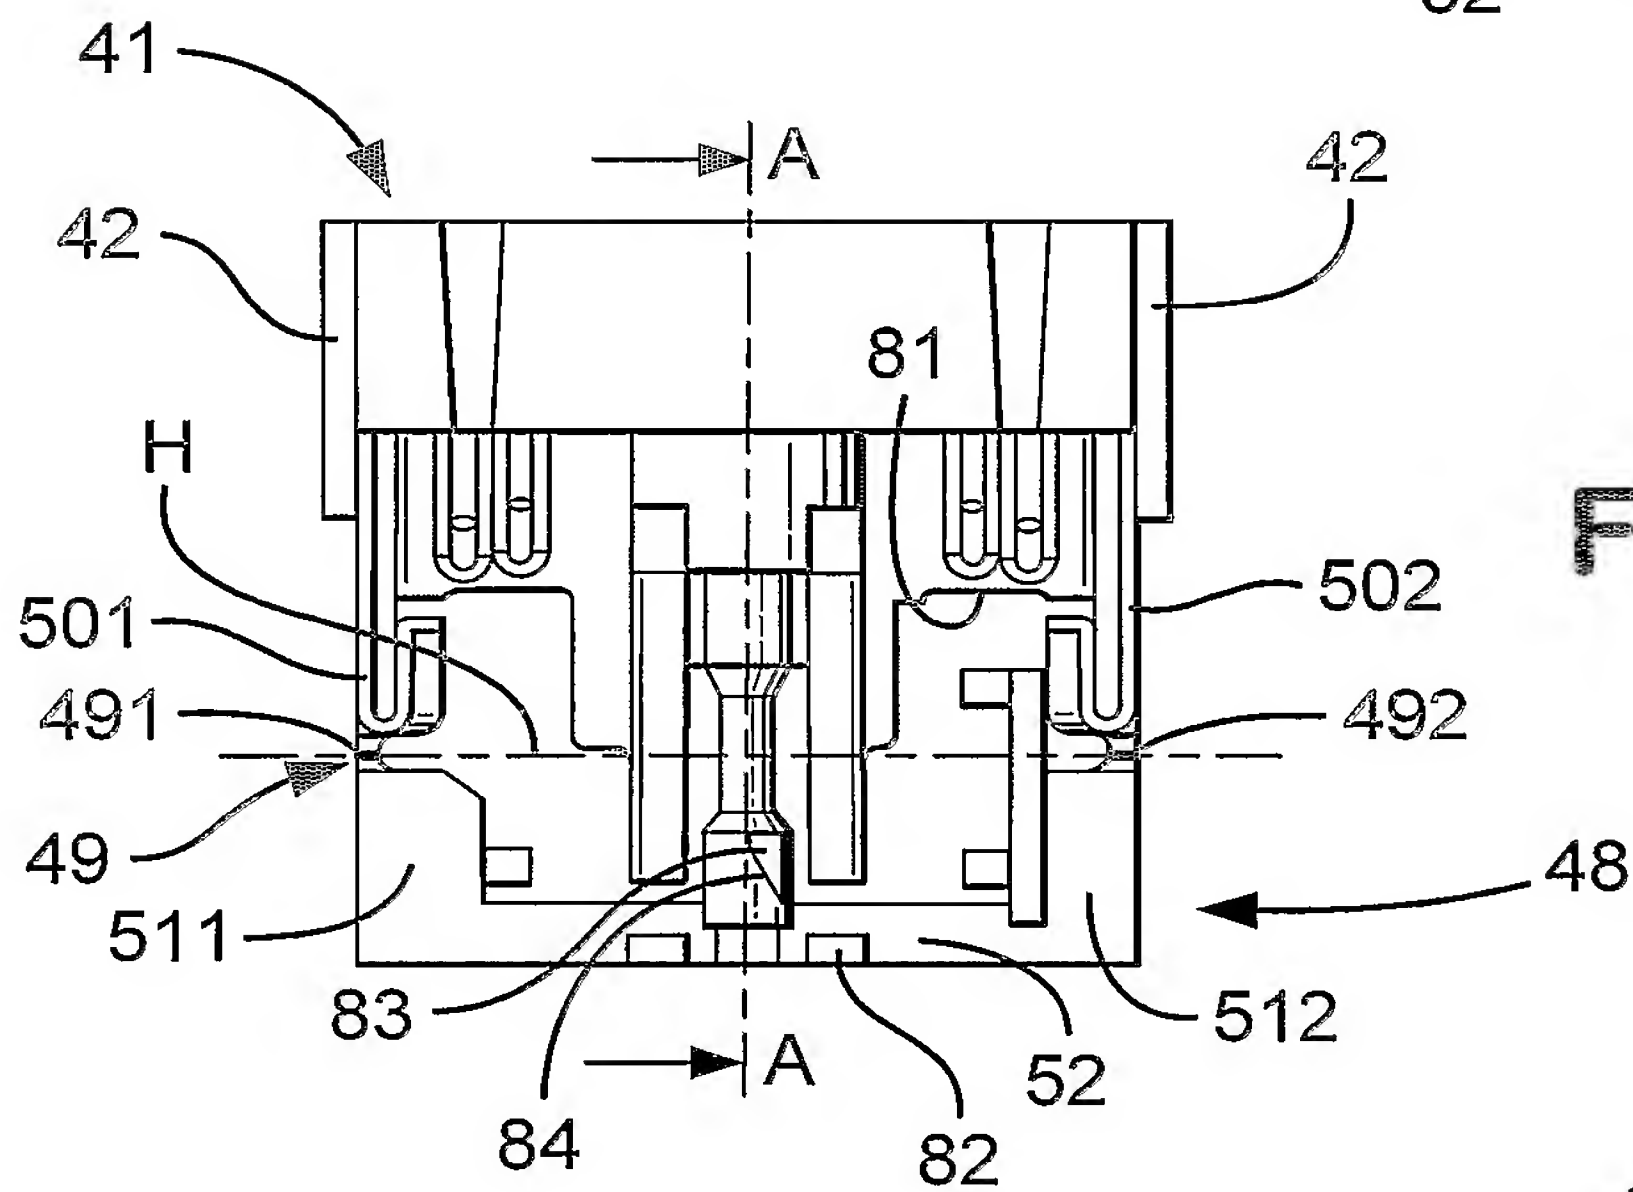


Fig.10

Fig.11

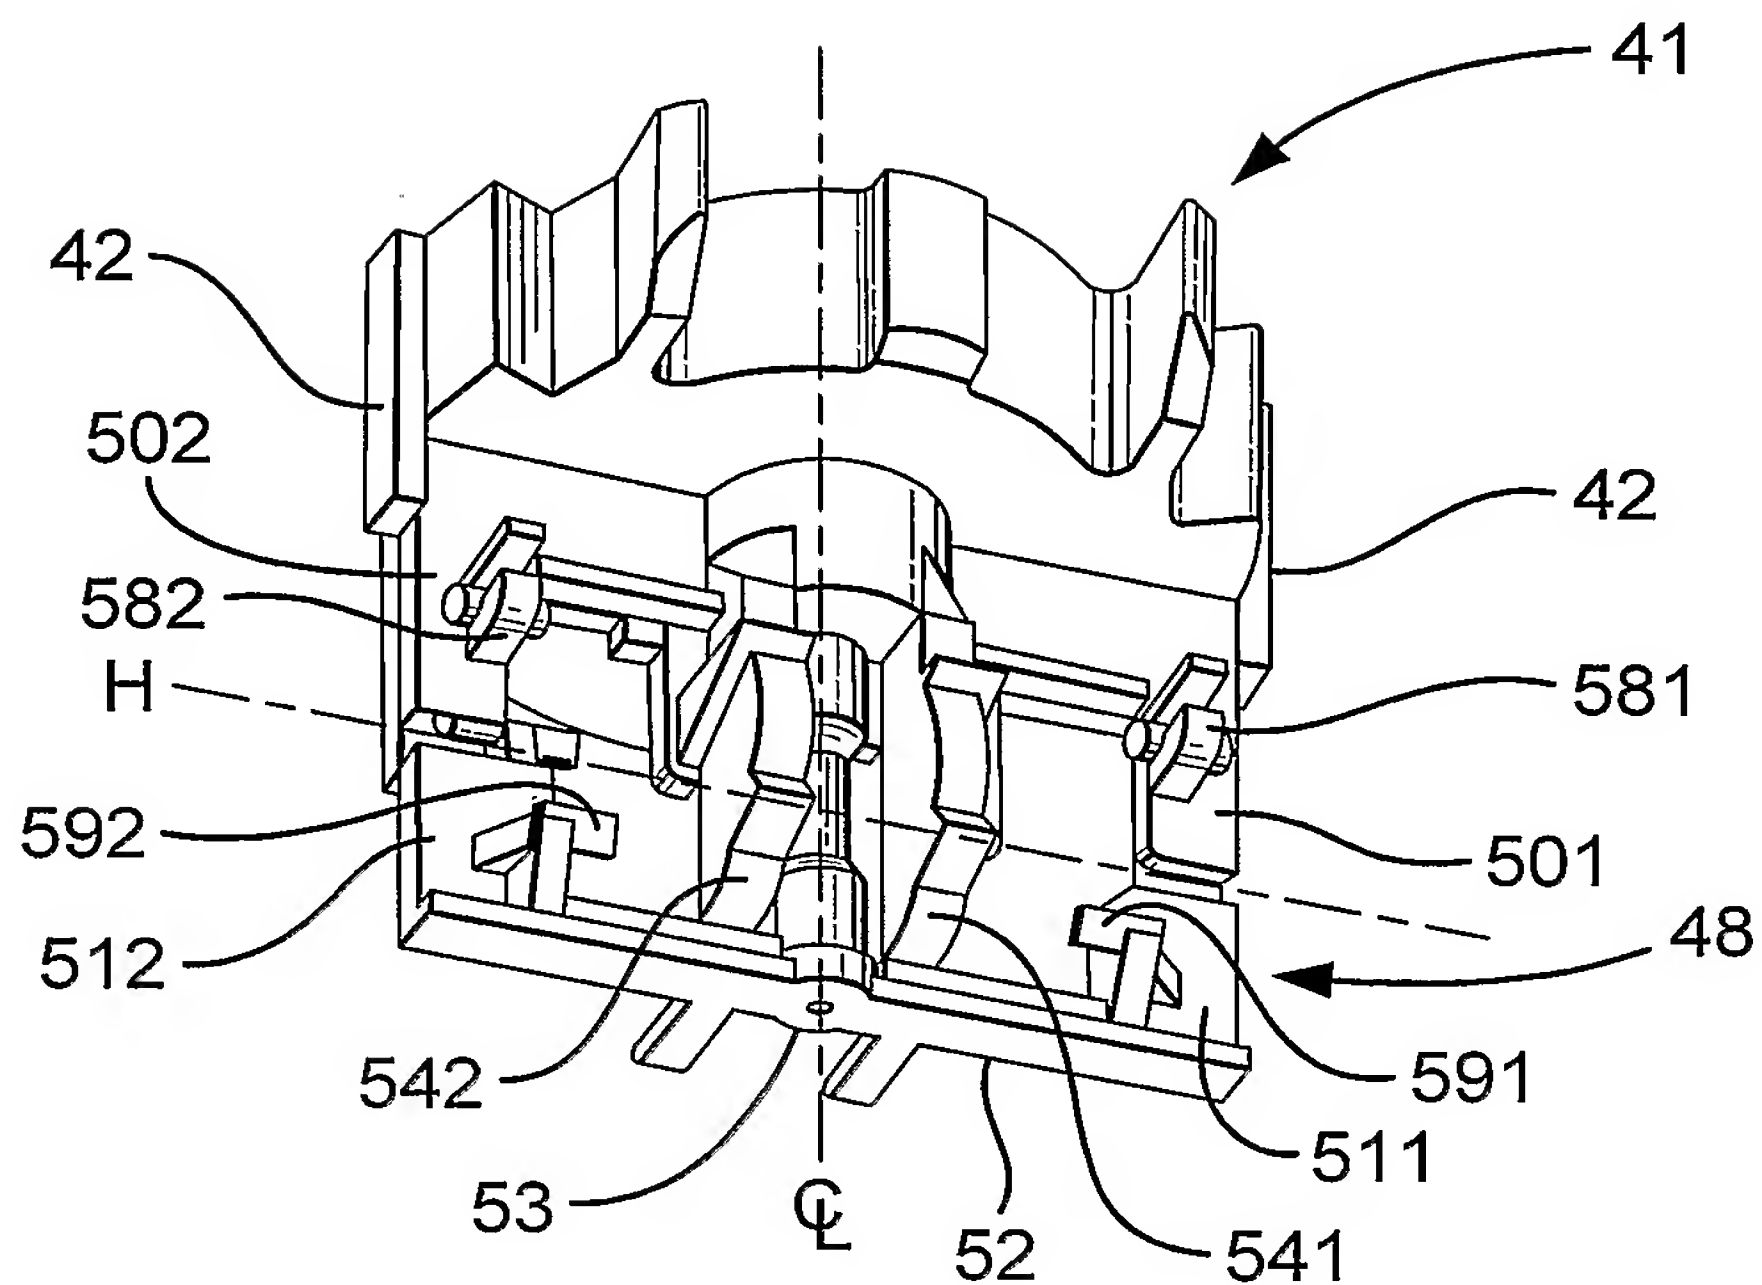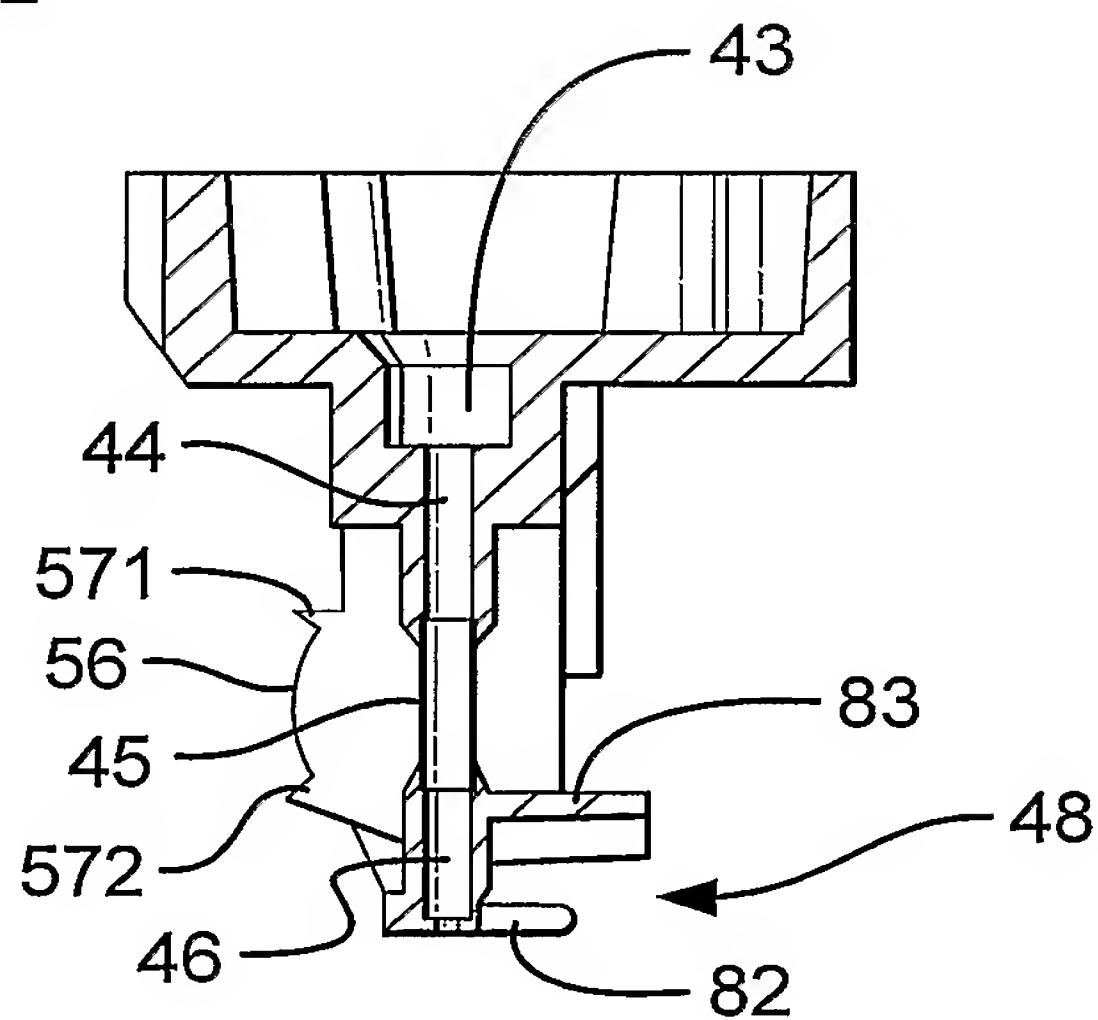

6/8

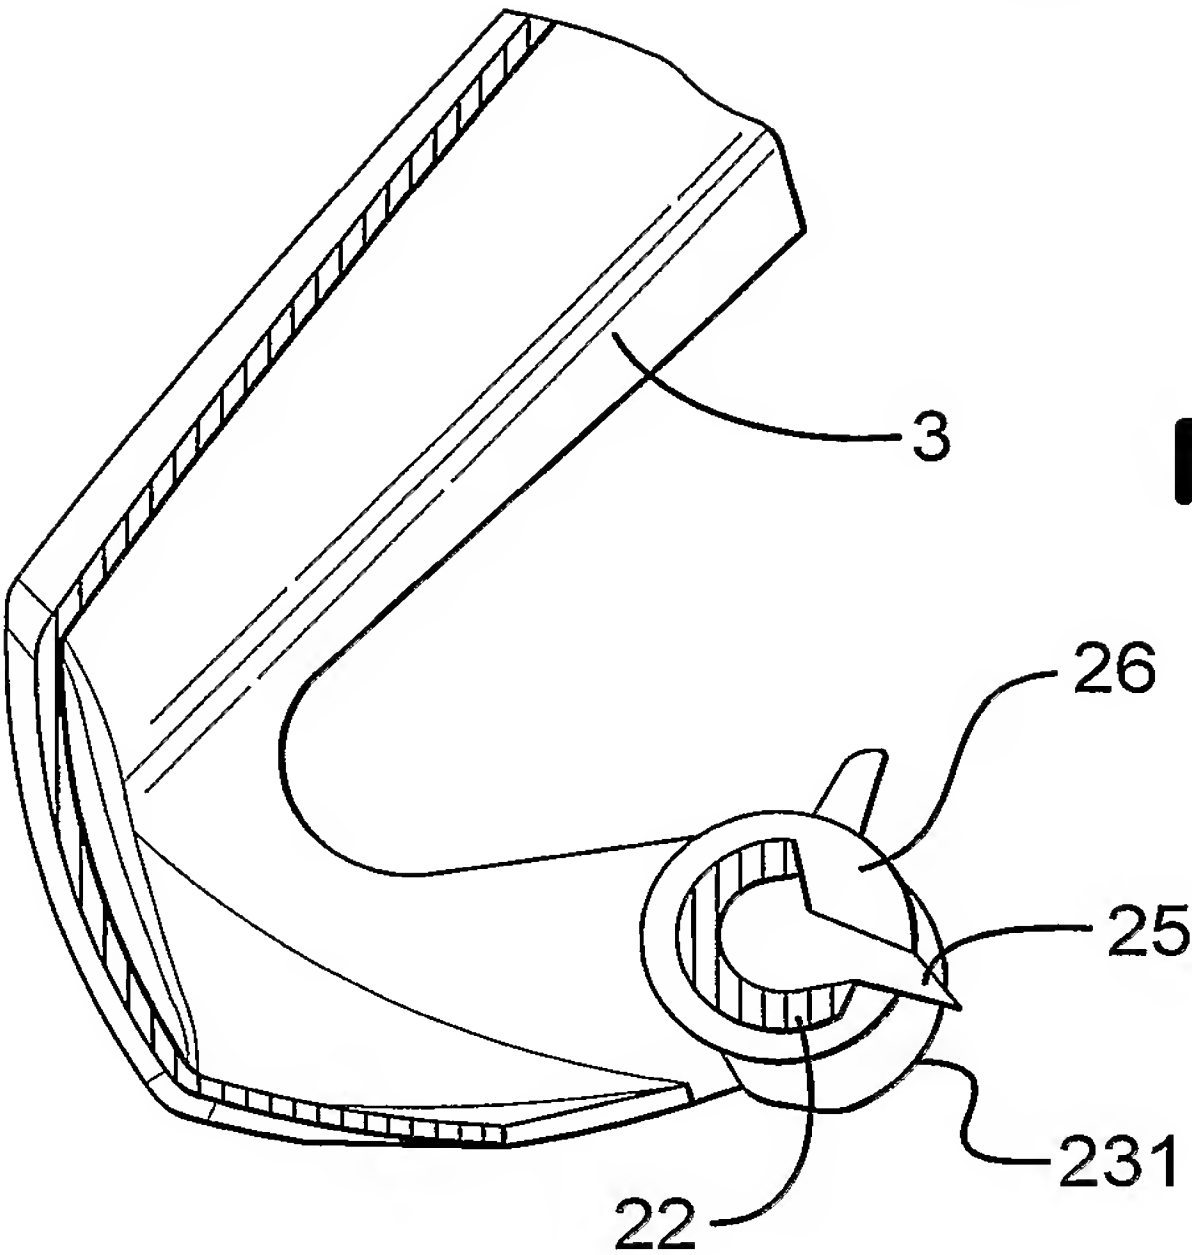


Fig.12

Fig.13

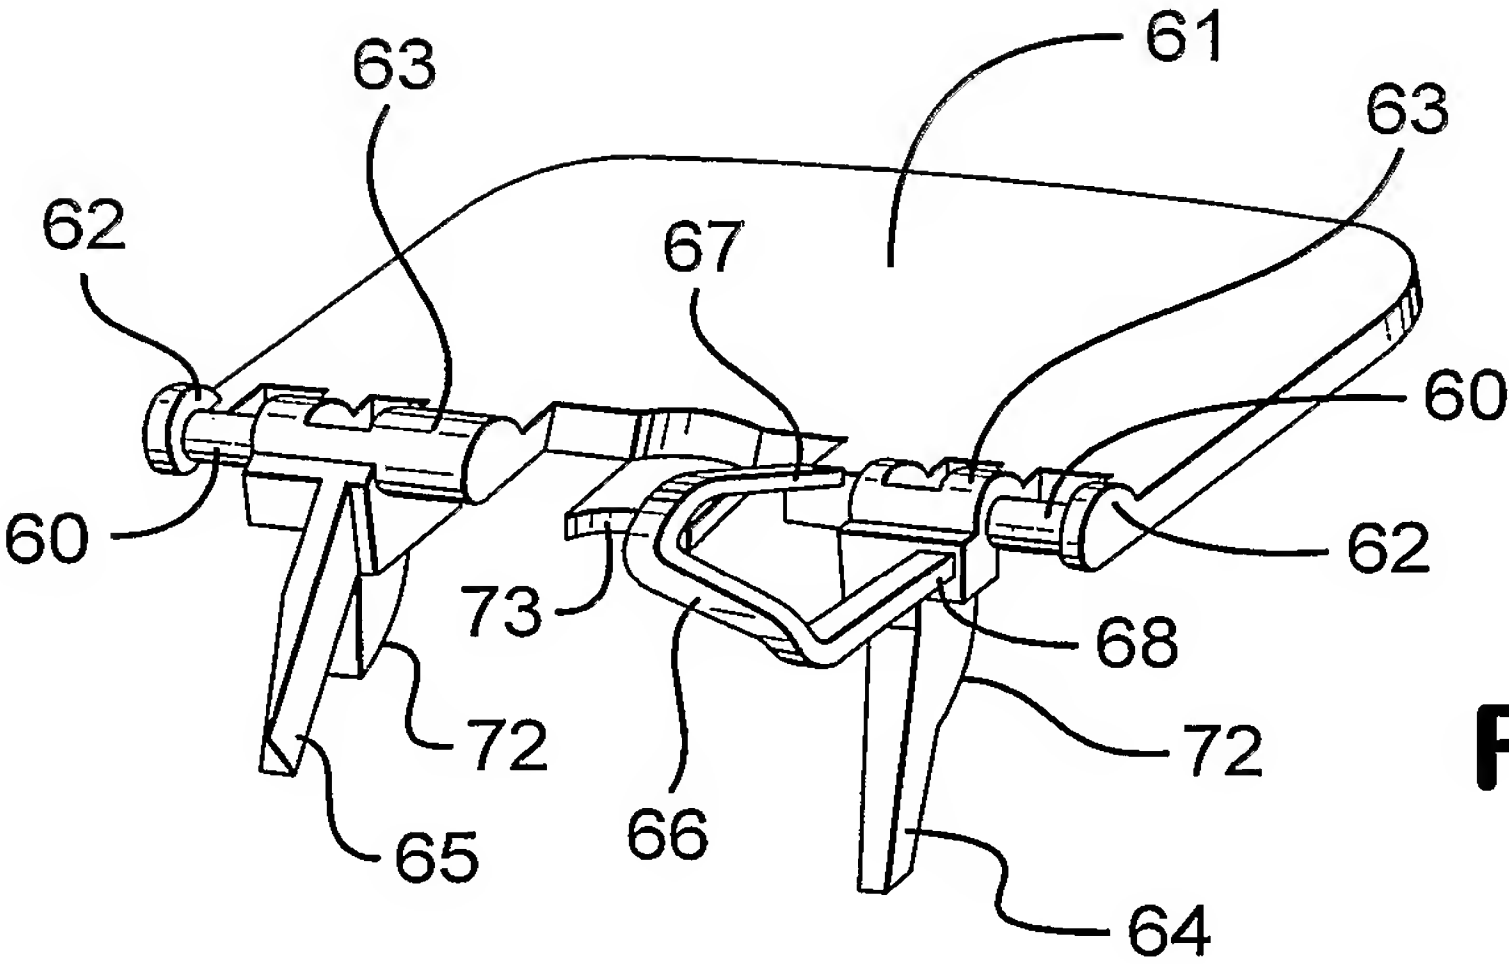
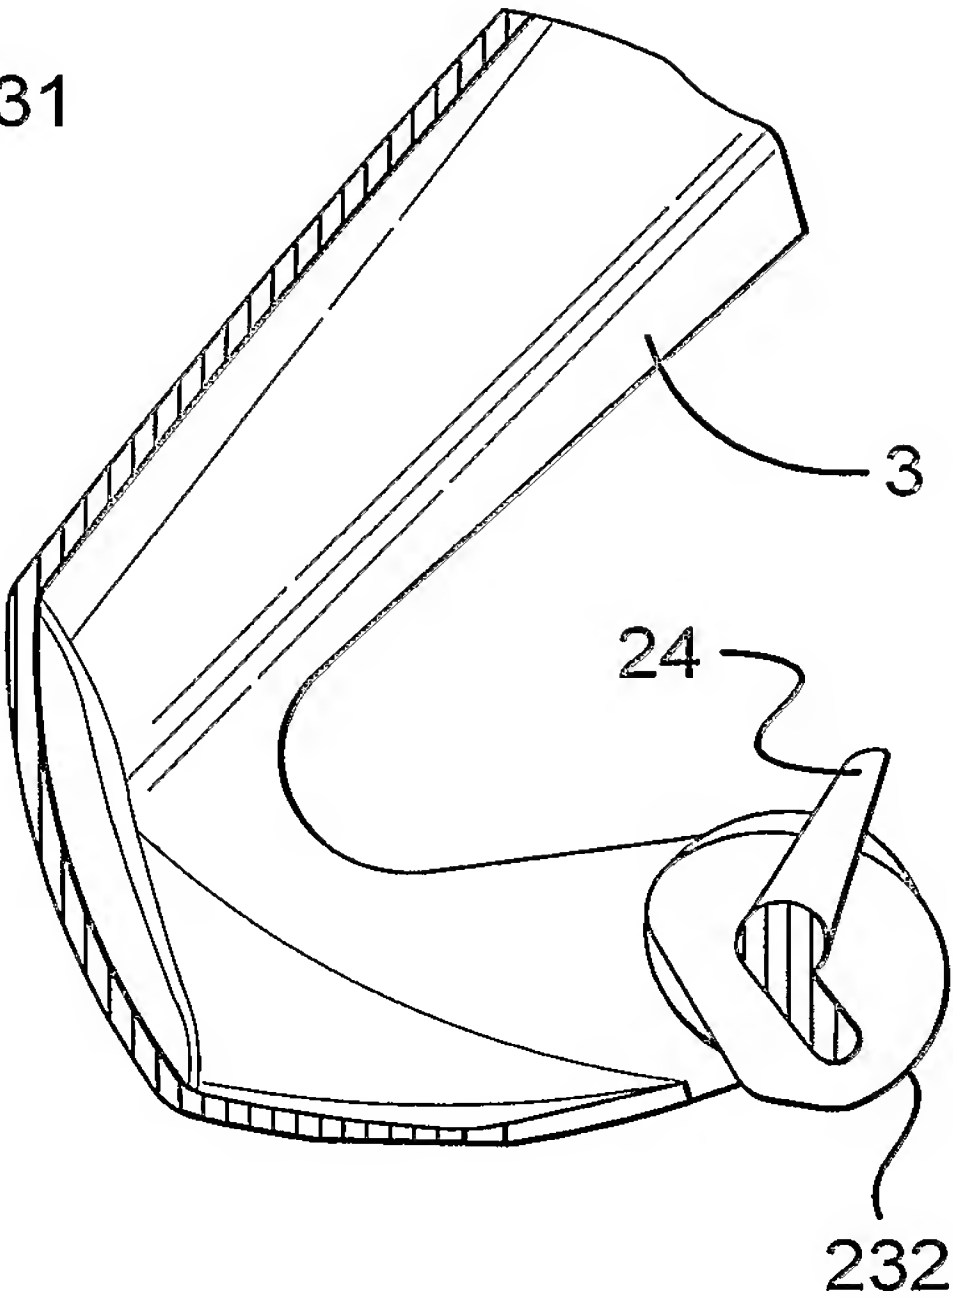


Fig.14

7/8

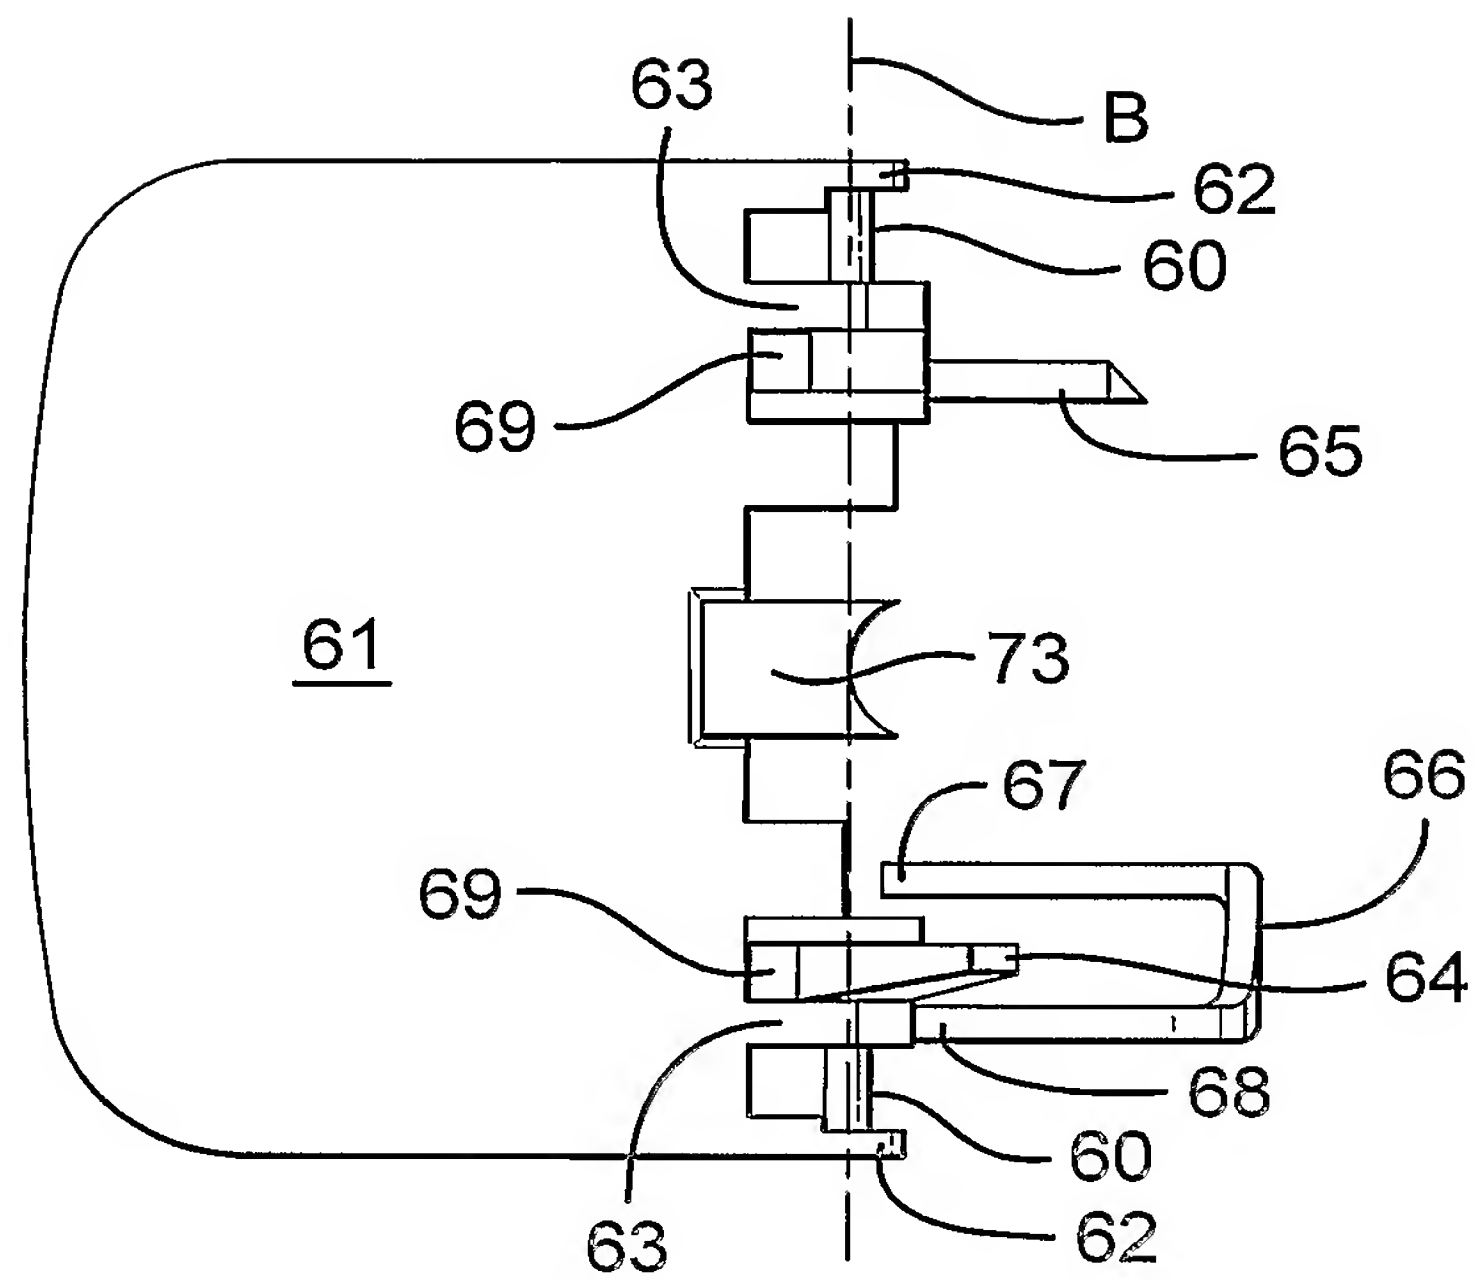


Fig.15


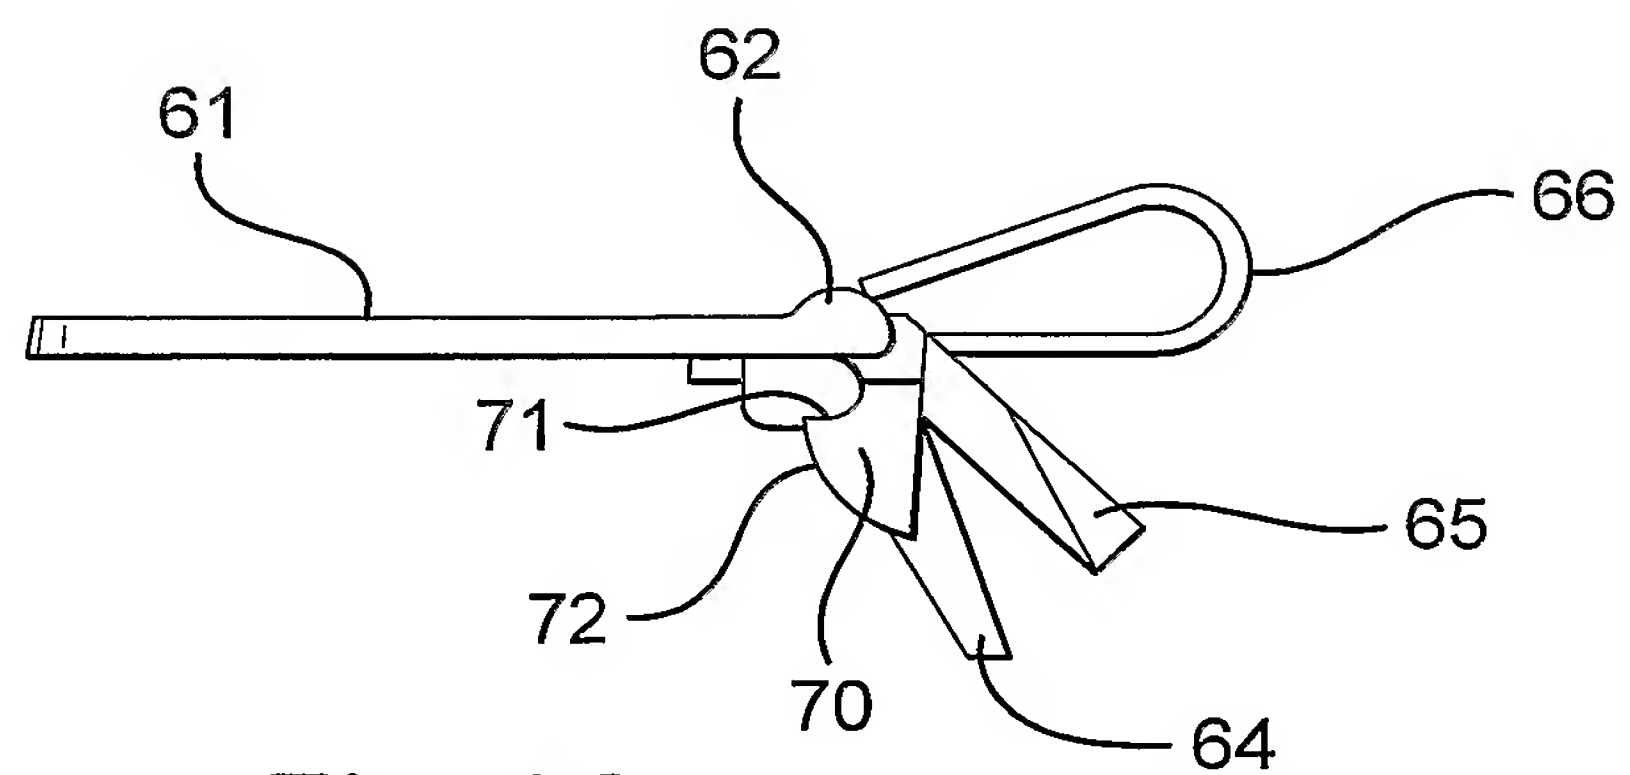


Fig.16

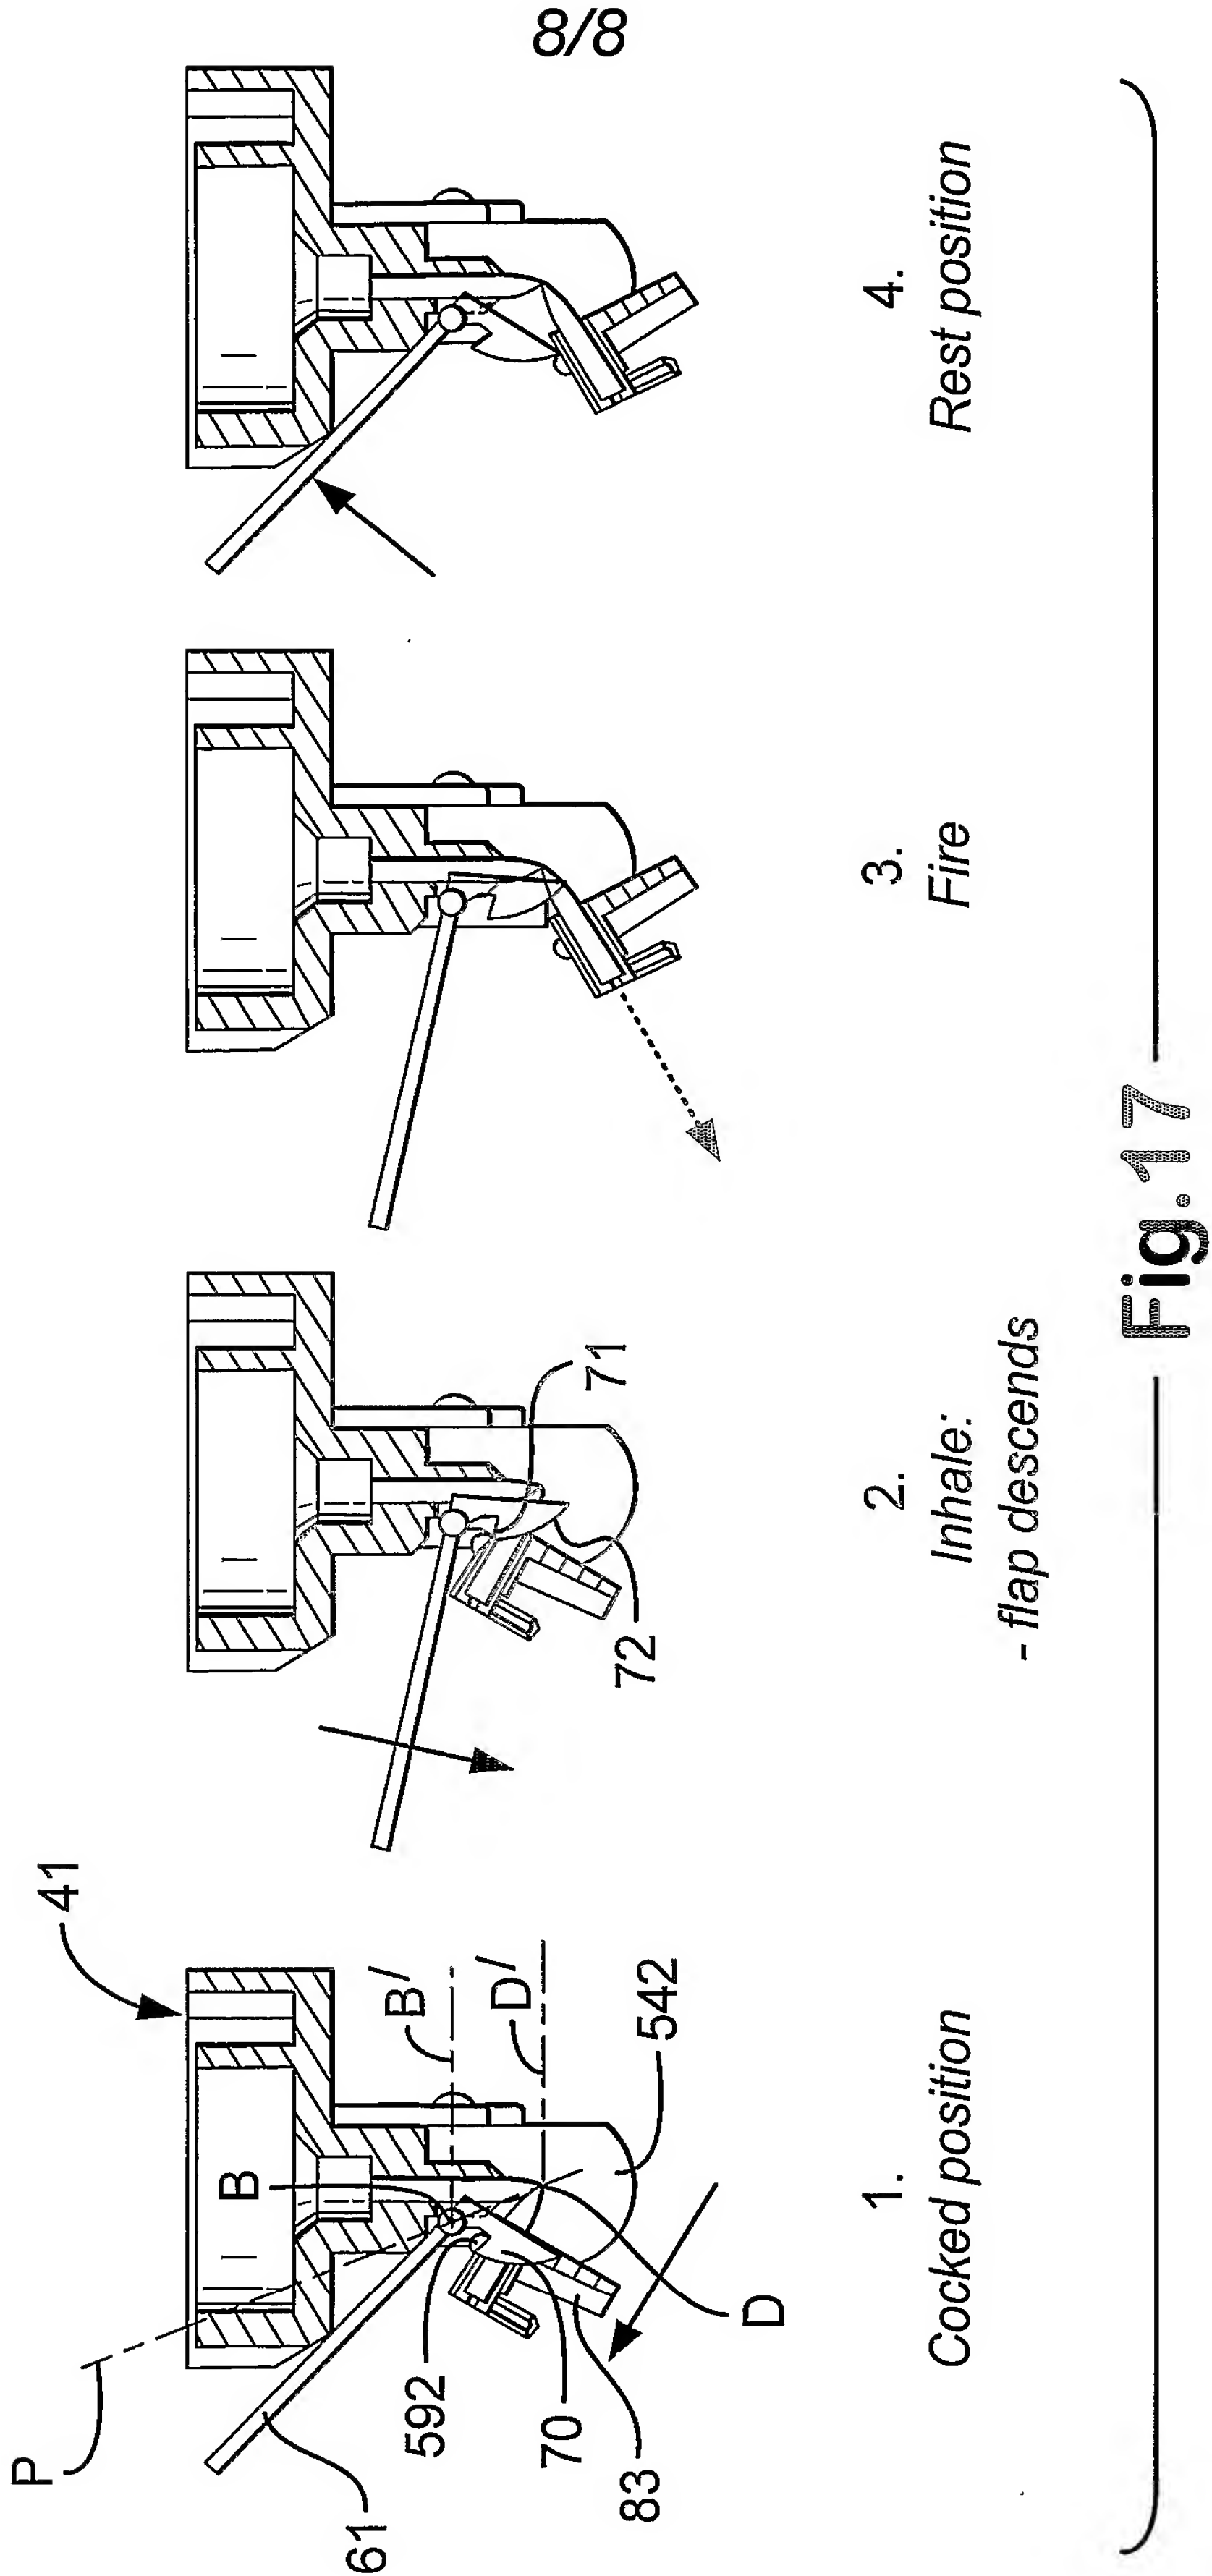

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB2004/000706A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61M15/00 F16K7/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M F16K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/058772 A (BACON RAYMOND J) 1 August 2002 (2002-08-01) cited in the application Whole document	1,5-11
A	WO 02/11802 A (MCDERMENT IAIN GRIERSON ;BACON RAYMOND J (GB); CLINICAL DESIGNS LT) 14 February 2002 (2002-02-14) cited in the application Whole document	1-12



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

19 May 2004

Date of mailing of the international search report

02/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Borowski, A

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No
PCT/GB2004/000706

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 02058772	A	01-08-2002	CA	2434539 A1		01-08-2002
			EP	1357966 A1		05-11-2003
			WO	02058772 A1		01-08-2002
			GB	2389052 A , B		03-12-2003
			NO	20033235 A		17-09-2003
			US	2004065320 A1		08-04-2004
<hr/>						
WO 0211802	A	14-02-2002	AU	2914302 A		18-02-2002
			CA	2417575 A1		14-02-2002
			EP	1303326 A2		23-04-2003
			WO	0211802 A2		14-02-2002
			GB	2381461 A		07-05-2003
			GB	2381462 A		07-05-2003
			GB	2381201 A		30-04-2003
			US	2003150448 A1		14-08-2003
<hr/>						